





9P~12P

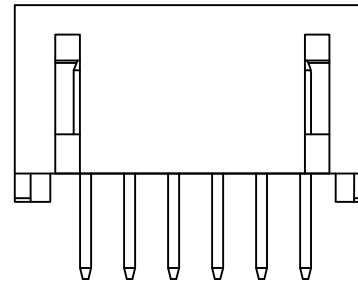

2P~8P

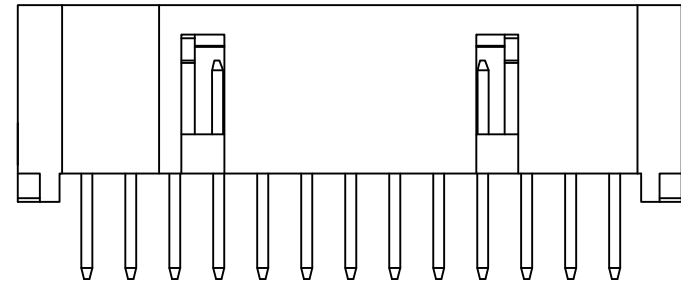

13P~15P

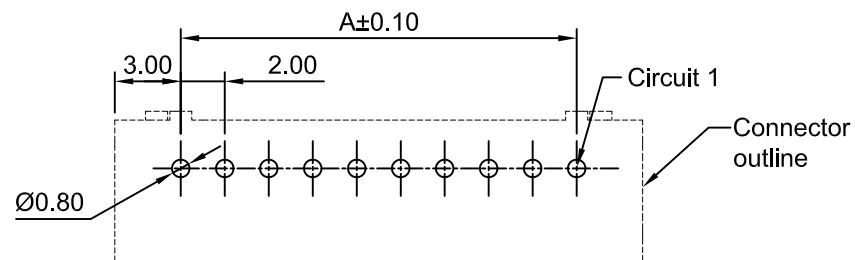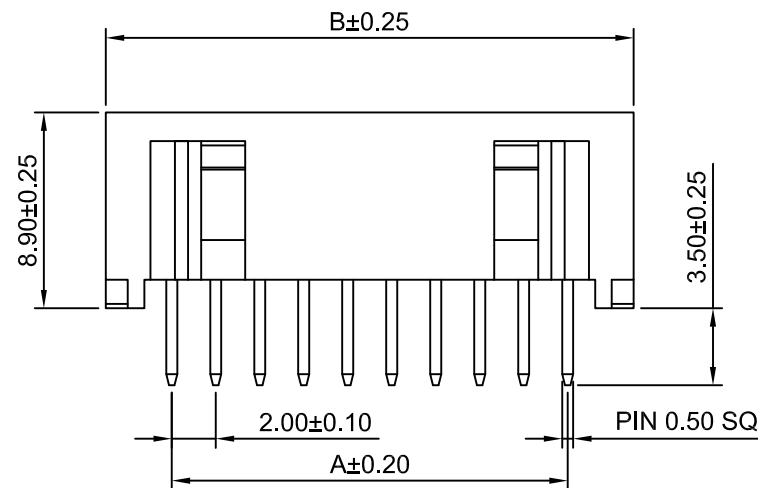

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Matte Tin over Nickel

Material: Nylon 9T UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)	
	A	B
A2012WVE-2P	2.00	8.00
A2012WVE-3P	4.00	10.00
A2012WVE-4P	6.00	12.00
A2012WVE-5P	8.00	14.00
A2012WVE-6P	10.00	16.00
A2012WVE-7P	12.00	18.00
A2012WVE-8P	14.00	20.00
A2012WVE-9P	16.00	22.00
A2012WVE-10P	18.00	24.00
A2012WVE-11P	20.00	26.00
A2012WVE-12P	22.00	28.00
A2012WVE-13P	24.00	30.00
A2012WVE-14P	26.00	32.00
A2012WVE-15P	28.00	34.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.00mm PITCH VERTICAL DIP HEADER		
DRAWN	CHK'D	APPR			
Haisen Li	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
				REV A1	
				A2012WVE-XP	