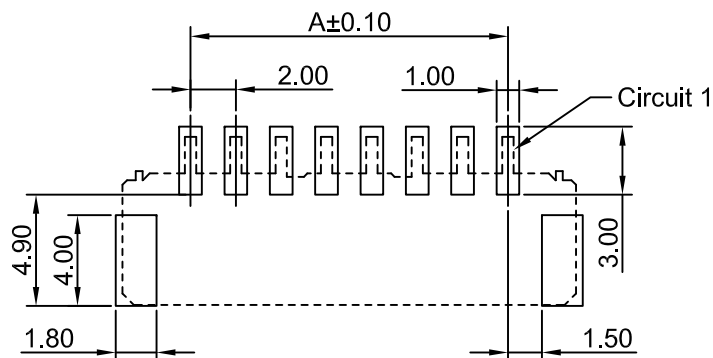
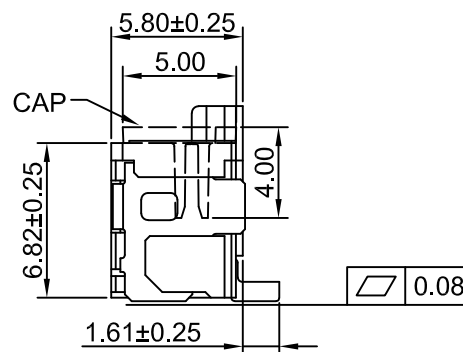
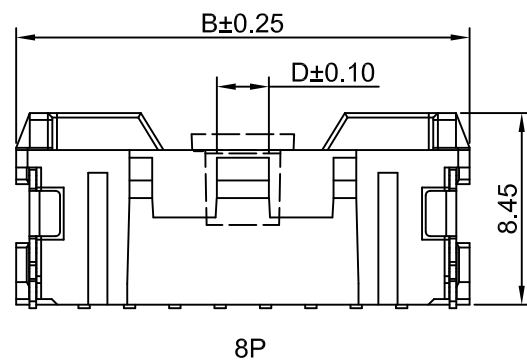

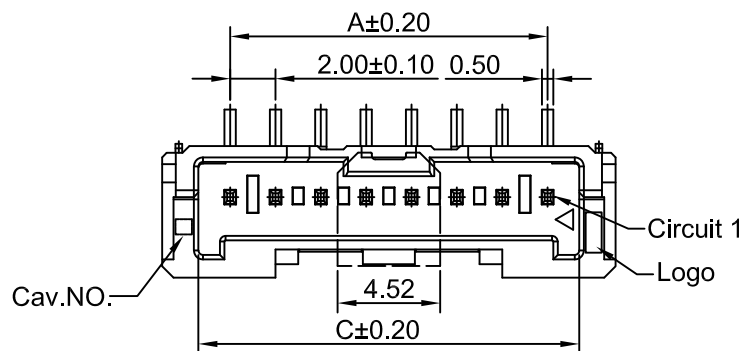


Ordering Information:
A2012WVJ-S-XP - *** - *** - *** - ***

- Part NO.
- Material:
(Blank): Nylon 9T,UL94V-0
- Color:
(Blank): Black
IV: Ivory
- Finish:
(Blank): Matte Tin over Nickel
G: Gold over Nickel(Au:1µin[0.03µm] Min,Mating Area)
G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)
G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)
G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)
G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)
- Packing:
(Blank): Tape & Reel with cap
RE: Tape & Reel

SPECIFICATIONS:

Current Rating: 3.4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass
Solder tabs: Brass/Matte Tin over Nickel

Ordering Information & Dimensions


Part NO.	Dimensions(mm)			
	A	B	C	D
A2012WVJ-S-2P	2.00	8.00	4.80	1.00
A2012WVJ-S-3P	4.00	10.00	6.80	
A2012WVJ-S-4P	6.00	12.00	8.80	1.80
A2012WVJ-S-5P	8.00	14.00	10.80	
A2012WVJ-S-6P	10.00	16.00	12.80	2.30
A2012WVJ-S-7P	12.00	18.00	14.80	
A2012WVJ-S-8P	14.00	20.00	16.80	
A2012WVJ-S-9P	16.00	22.00	18.80	
A2012WVJ-S-10P	18.00	24.00	20.80	5.00
A2012WVJ-S-11P	20.00	26.00	22.80	
A2012WVJ-S-12P	22.00	28.00	24.80	
A2012WVJ-S-13P	24.00	30.00	26.80	
A2012WVJ-S-14P	26.00	32.00	28.80	
A2012WVJ-S-15P	28.00	34.00	30.80	
A2012WVJ-S-16P	30.00	36.00	32.80	

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 2	2.00mm PITCH VERTICAL WAFER - SMD TYPE	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances		THIRD ANGLE PROJECTION	A2012WVJ-S-XP	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			REV A0	


A0	NEW RELEASE	2024.12.03
REV	DESCRIPTION	DATE




2P








3P




4P~5P

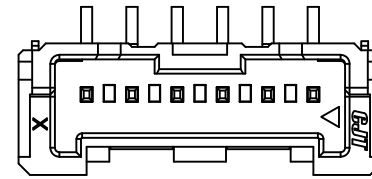


6P~7P

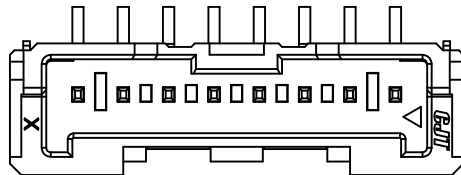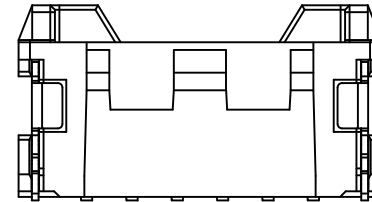




8P

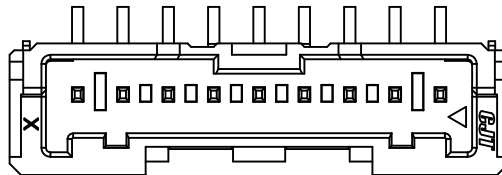

9P~10P

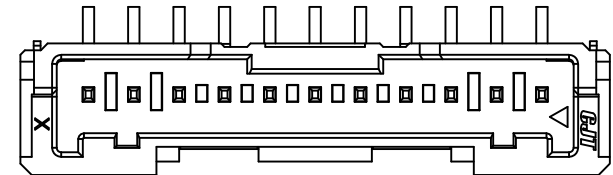




11P~16P

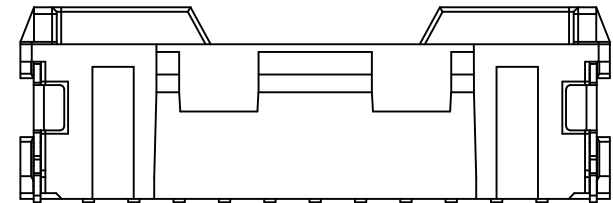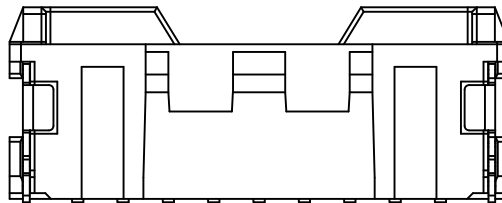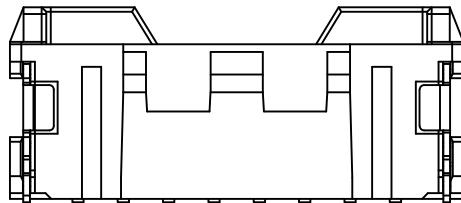

CJTconnCHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	2 of 2	2.00mm PITCH VERTICAL WAFER - SMD TYPE	
DRAWN	CHK'D	APPR'D	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin	A2012WVJ-S-XP	
General Tolerances		THIRD ANGLE PROJECTION	REV	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A0	








A0	NEW RELEASE	2024.12.03
REV	DESCRIPTION	DATE

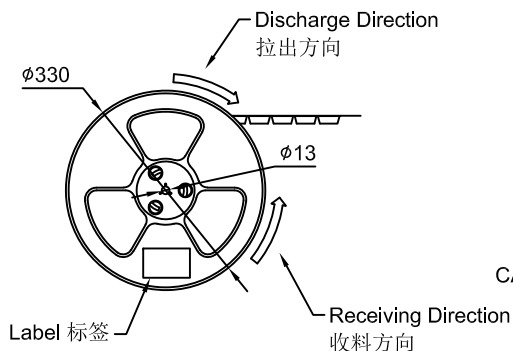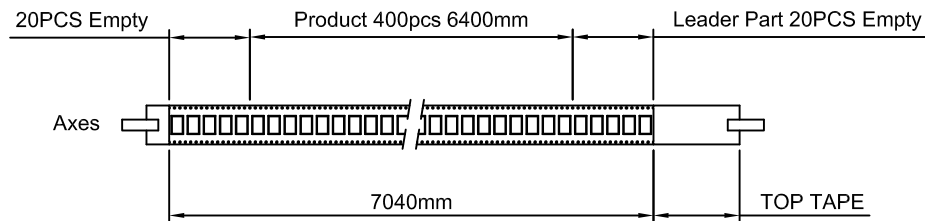

Single hole:None Hole Side
单孔: 贴无链孔侧

Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

COVER TAPE PEEL STRENGTH:20~120g
PEEL SPEED:300mm/minute

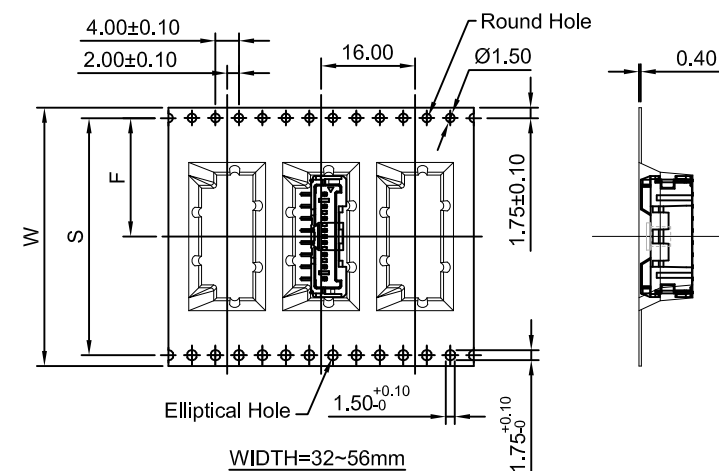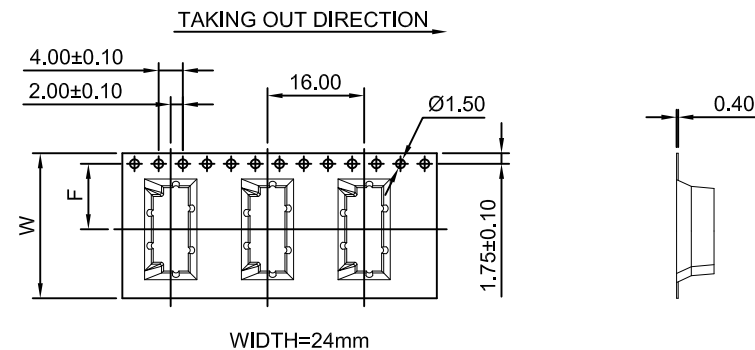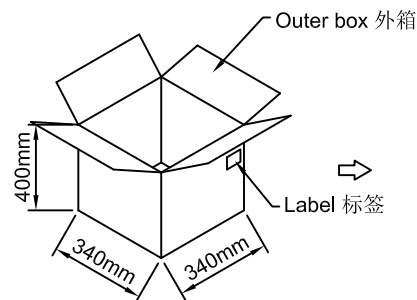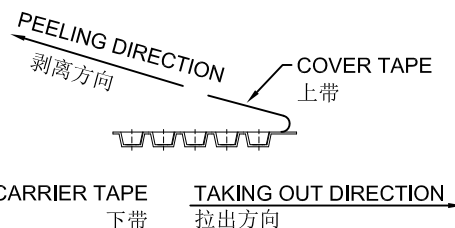

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P~4P	24.00	/	11.50	28.50	24.50	400	13	5200
5P~7P	32.00	28.40	14.20	36.50	32.50	400	10	4000
8P~13P	44.00	40.40	20.20	48.50	44.50	400	7	2800
14P~16P	56.00	52.40	26.20	60.50	56.50	400	6	2400

NOTES:

- Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.12.14
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	1:1.25	1 of 1	2.00mm PITCH VERTICAL WAFER - SMD TYPE - PACKING	
DRAWN	CHK'D	APPR	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin	A2012WVJ-S-XP	
General Tolerances		THIRD ANGLE PROJECTION	REV A0	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				