

Ordering Information:

A2501WV-F-XP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon66,UL94V-0,IEC60335-1,5th
Edition Glow Wire Capable.

3.Halogen:




(Blank):Normal Material

HF: Halogen Free


4.Finish:

(Blank) - Tin over Nickel

G - Gold over Nickel

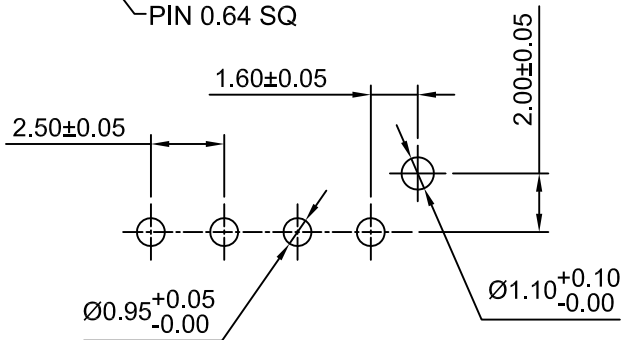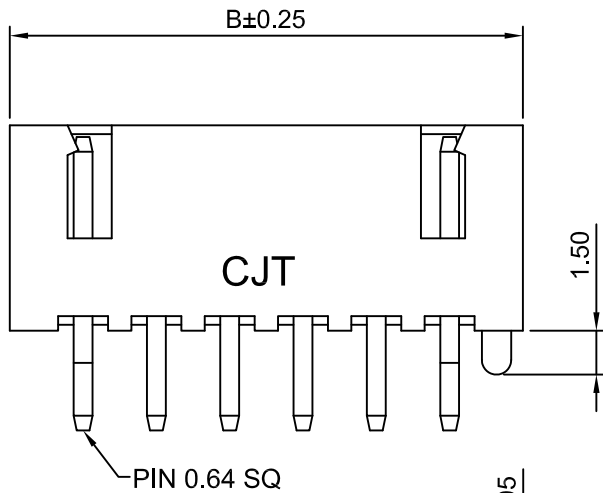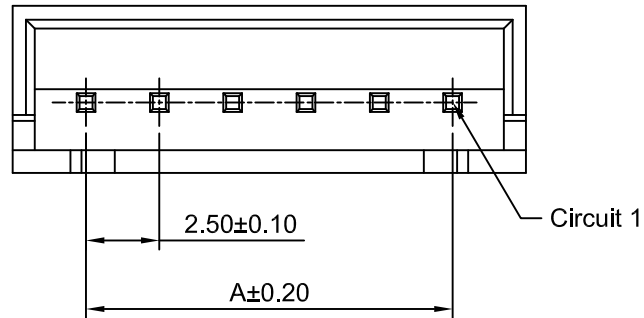

P.C.B LAYOUT

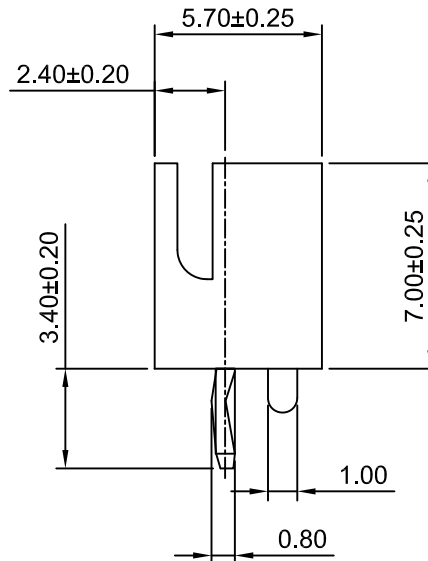

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	10P	22.50	27.50
3P	5.00	10.00	11P	25.00	30.00
4P	7.50	12.50	12P	27.50	32.50
5P	10.00	15.00	13P	30.00	35.00
6P	12.50	17.50	14P	32.50	37.50
7P	15.00	20.00	15P	35.00	40.00
8P	17.50	22.50	16P	37.50	42.50
9P	20.00	25.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRAWN		CHK'D		APPR		2.50mm PITCH	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		180° WAFER	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
DRAWING NO.						A2501WV-F-XP	
REV A1							