
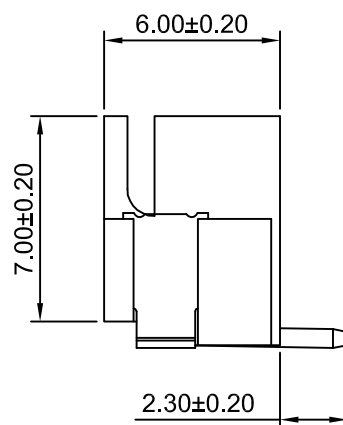
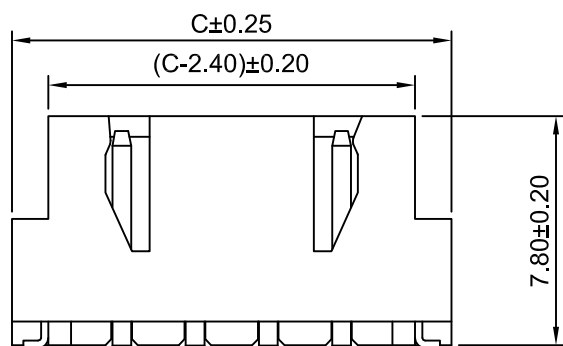
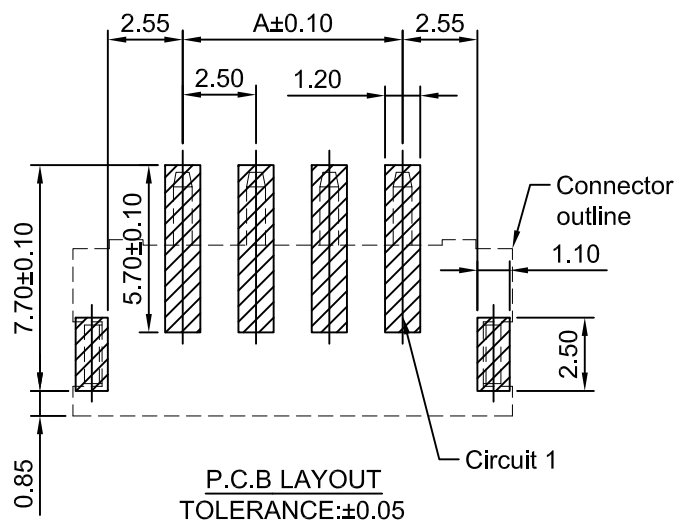


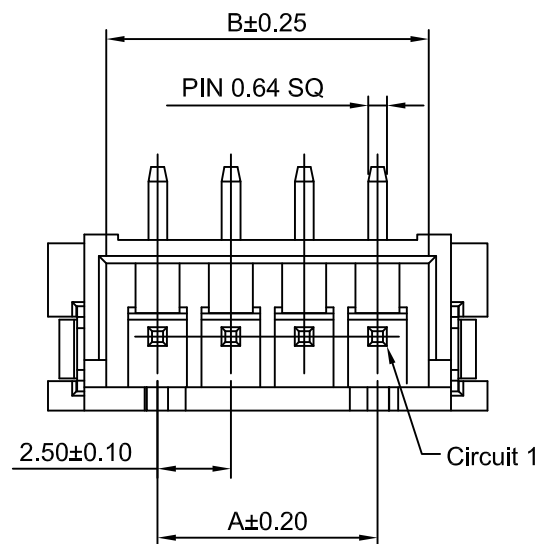

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

SMT Material: Brass/Tin over Nickel

Material: LCP, UL94V-0 (Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2501WV-S-2P	2.50	6.00	10.00
A2501WV-S-3P	5.00	8.50	12.50
A2501WV-S-4P	7.50	11.00	15.00
A2501WV-S-5P	10.00	13.50	17.50
A2501WV-S-6P	12.50	16.00	20.00
A2501WV-S-7P	15.00	18.50	22.50
A2501WV-S-8P	17.50	21.00	25.00
A2501WV-S-9P	20.00	23.50	27.50
A2501WV-S-10P	22.50	26.00	30.00
A2501WV-S-11P	25.00	28.50	32.50
A2501WV-S-12P	27.50	31.00	35.00
A2501WV-S-13P	30.00	33.50	37.50
A2501WV-S-14P	32.50	36.00	40.00
A2501WV-S-15P	35.00	38.50	42.50
A2501WV-S-16P	37.50	41.00	45.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.50mm PITCH VERTICAL HEADER -SMD TYPE	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A2
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2501WV-S-XP	