


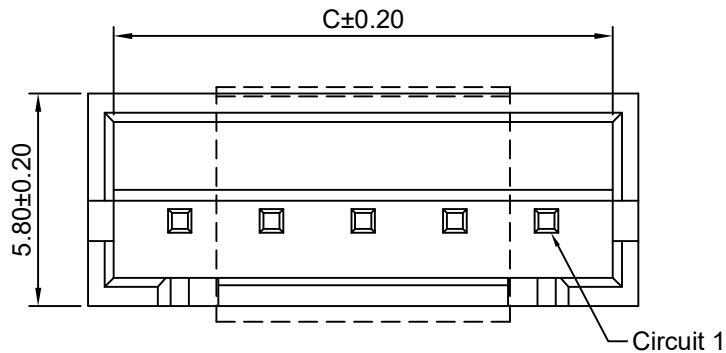

Ordering Information:

A2501WV-XP-2-P-LCP - $\frac{**}{2}$ - D22 - $\frac{***}{3}$

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min




Withstanding Voltage: 1000V AC/minute

Pin Material: Brass




Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions





Part NO.	Dimensions(mm)		
	A	B	C
A2501WV-2P-2-P-LCP	2.50	7.50	6.10
A2501WV-3P-2-P-LCP	5.00	10.00	8.60
A2501WV-4P-2-P-LCP	7.50	12.50	11.10
A2501WV-5P-2-P-LCP	10.00	15.00	13.60
A2501WV-6P-2-P-LCP	12.50	17.50	16.10
A2501WV-7P-2-P-LCP	15.00	20.00	18.60
A2501WV-8P-2-P-LCP	17.50	22.50	21.10
A2501WV-9P-2-P-LCP	20.00	25.00	23.60
A2501WV-10P-2-P-LCP	22.50	27.50	26.10
A2501WV-11P-2-P-LCP	25.00	30.00	28.60
A2501WV-12P-2-P-LCP	27.50	32.50	31.10
A2501WV-13P-2-P-LCP	30.00	35.00	33.60
A2501WV-14P-2-P-LCP	32.50	37.50	36.10
A2501WV-15P-2-P-LCP	35.00	40.00	38.60
A2501WV-16P-2-P-LCP	37.50	42.50	41.10

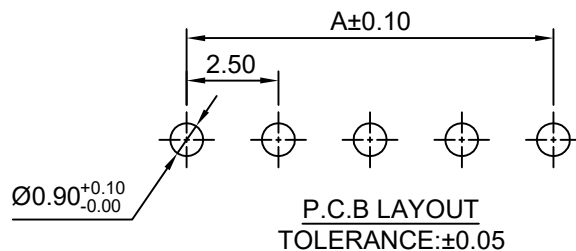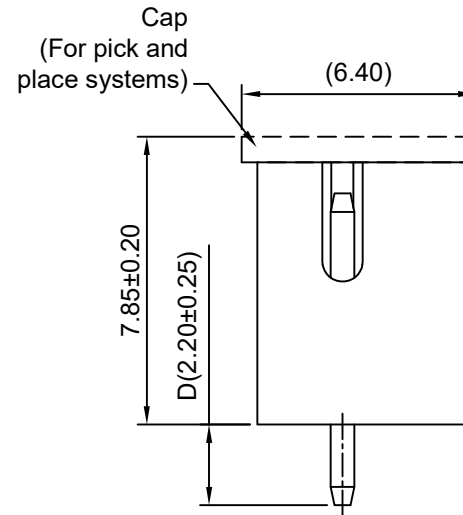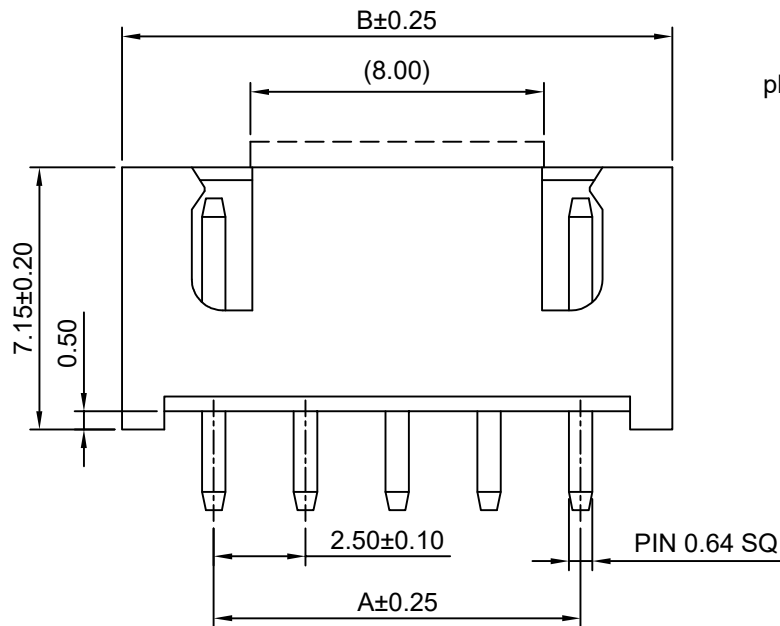


CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	2.50mm PITCH VERTICAL SINGLE ROW WAFER
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2501WV-XP-2-P-LCP-D22
x.±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
			REV A1

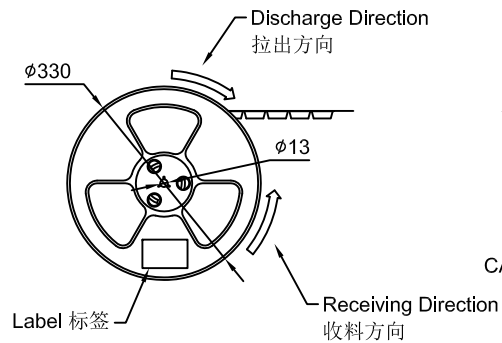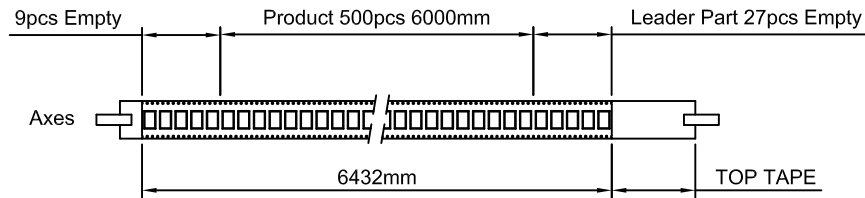


Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

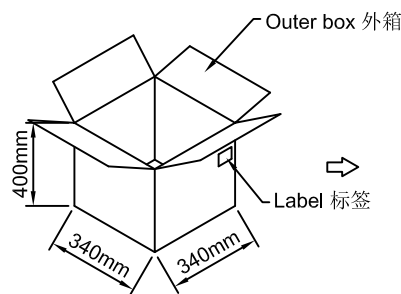


COVER TAPE PEEL STRENGTH:20~120g
PEEL SPEED:300mm/minute

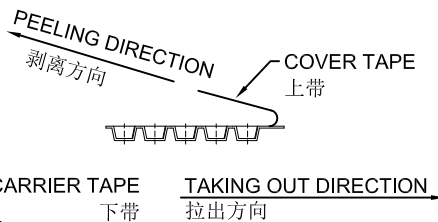

TAKING OUT DIRECTION

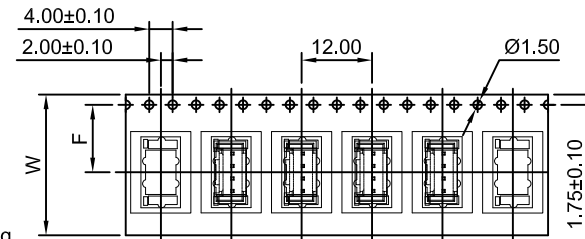

WIDTH=16~24mm

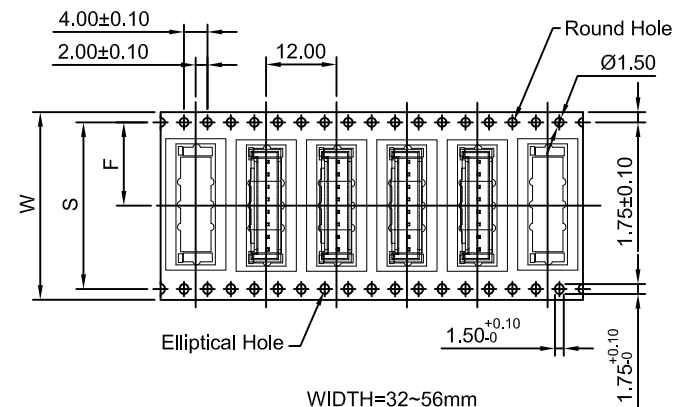

WIDTH=32~56mm

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P	16.00	/	7.50	20.50	16.50	500	19	9500
3P~4P	24.00	/	11.50	28.50	24.50	500	13	6500
5P~6P	32.00	28.40	14.20	36.50	32.50	500	10	5000
7P~10P	44.00	40.40	20.20	48.50	44.50	500	7	3500
14P~15P	56.00	52.40	26.20	60.50	56.50	500	6	3000

NOTES:

- 1.Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 2.10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.11.16
REV	DESCRIPTION	DATE

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1:1.25	1 of 1	2.50mm PITCH VERTICAL WAFER PACKING		
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2501WV-XP-2-P-LCP-D22		A0