

Ordering Information:

A2501WVC-F-XP - *
1 2

1.Part No.

2.Color:

(blank):White


YL:Yellow

BK:Black


BL:Blue

RD:Red


GN:Green

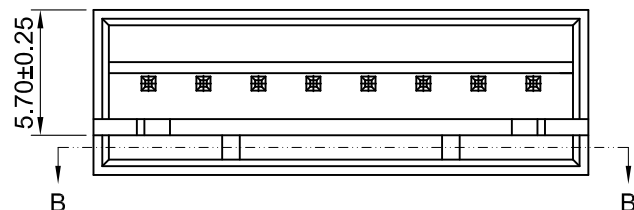



05~20P




03~04P




02P

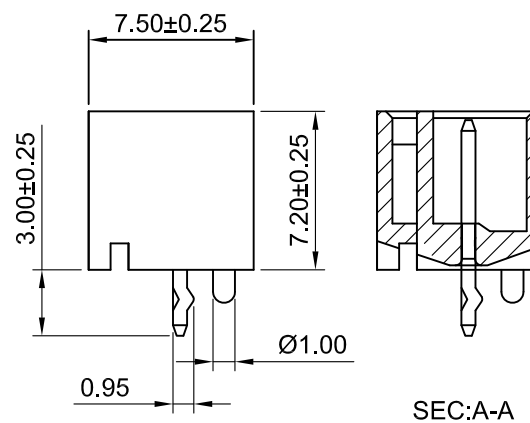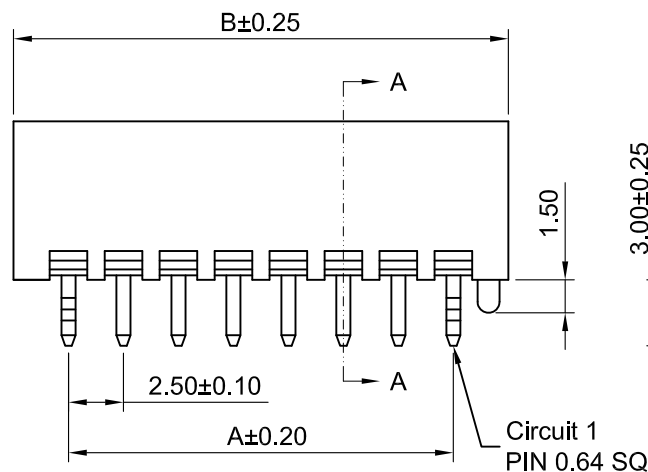

SEC:A-A

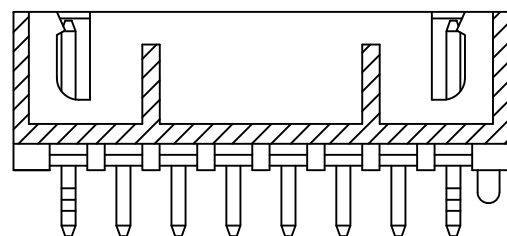

SEC:B-B

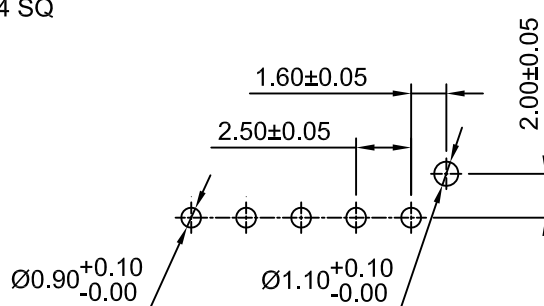

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin Over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	12P	27.50	32.50
3P	5.00	10.00	13P	30.00	35.00
4P	7.50	12.50	14P	32.50	37.50
5P	10.00	15.00	15P	35.00	40.00
6P	12.50	17.50	16P	37.50	42.50
7P	15.50	20.00	17P	40.00	45.00
8P	17.50	22.50	18P	42.50	47.50
9P	20.00	25.00	19P	45.00	50.00
10P	22.50	27.50	20P	47.50	52.50
11P	25.00	30.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 3:1, Sheet: 1 of 1

Title:

2.50mm PITCH

Draw BY: Dengchun Yi, Approved: Jack Yin

180° WAFER

General Tolerance

x.xx±0.25, x.xx±0.20, x.xxx±0.15, ANGLE±

DRAW NO: A2501WVC-F-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2019.06.27