

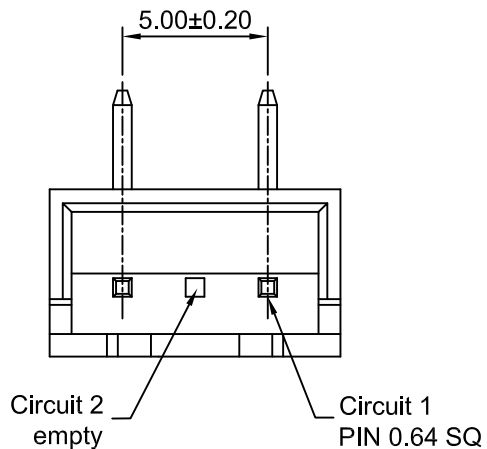
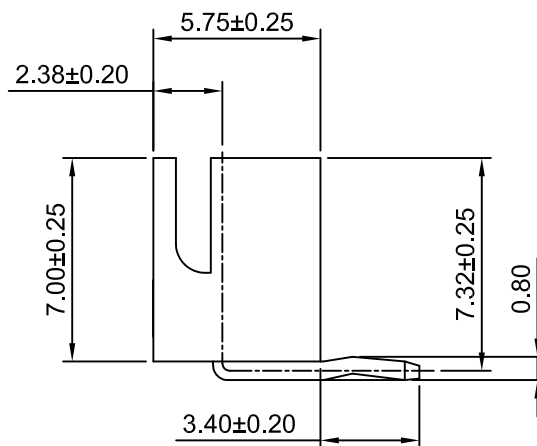


TYPE 2



TYPE 1



P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2501WVR-XP - ** - A
1 2

1.Part No.

2.Style:

(Blank): Type 1

2: Type 2

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	5.00	10.00	13P	30.00	35.00
5P	10.00	15.00	15P	35.00	40.00
7P	15.50	20.00	17P	40.00	45.00
9P	20.00	25.00	19P	45.00	50.00
11P	25.00	30.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRWN	CHK'D	APPR	5.00mm PITCH RIGHT-ANGLE WAFER		
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		
A0			A2501WVR-XP-A		
REV			REV A0		

A0	NEW RELEASE	2022.03.22
REV	DESCRIPTION	DATE