
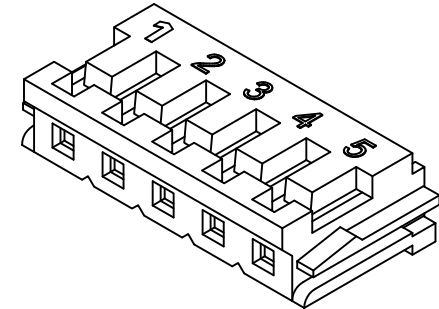
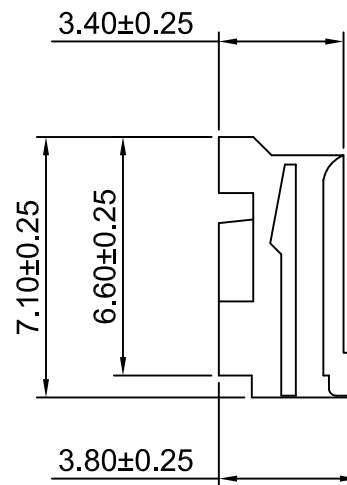
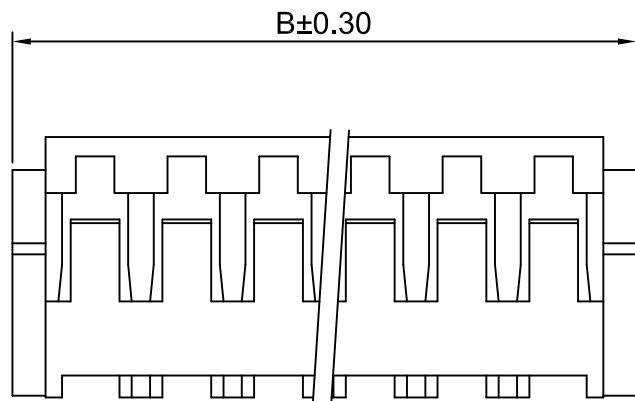


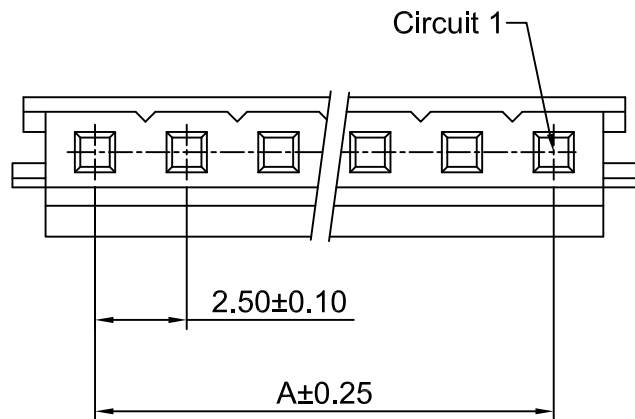

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.00	10P	22.50	27.00
3P	5.00	9.50	11P	25.00	29.50
4P	7.50	12.00	12P	27.50	32.00
5P	10.00	14.50	13P	30.00	34.50
6P	12.50	17.00	14P	32.50	37.00
7P	15.00	19.50	15P	35.00	39.50
8P	17.50	22.00	16P	37.50	42.00
9P	20.00	24.50			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.50mm Pitch Housing	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2502H-XP	
x,x±0.25							
x,xxx±0.20							
x,xxxx±0.15							
ANGLES ±1°						REV A2	

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2022.12.13
A1	CHANGE THE DRAWING	2019.11.01
A0	NEW RELEASE	2020.09.19