


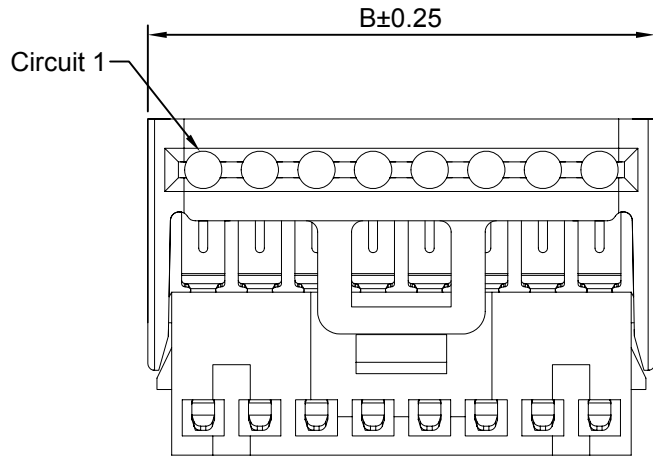


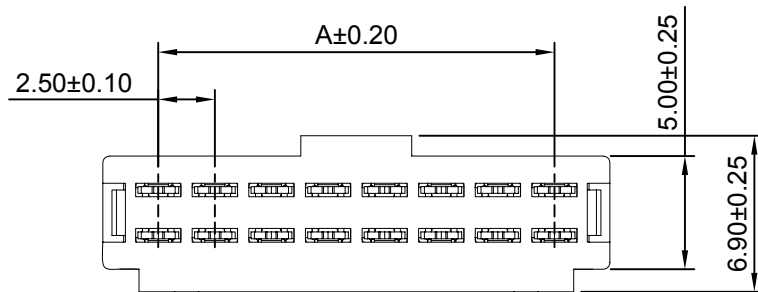

8P~15P



2P~7P

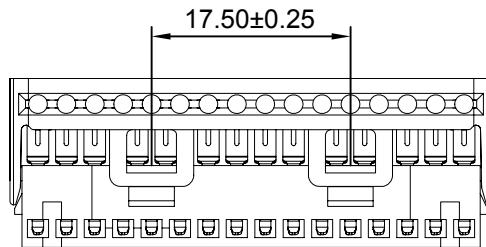

16P~20P

SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +115°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: PBT,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.40	12P	27.50	32.40
3P	5.00	9.90	13P	30.00	34.90
4P	7.50	12.40	14P	32.50	37.40
5P	10.00	14.90	15P	35.00	39.90
6P	12.50	17.40	16P	37.50	42.40
7P	15.00	19.90	17P	40.00	44.90
8P	17.50	22.40	18P	42.50	47.40
9P	20.00	24.90	19P	45.00	49.90
10P	22.50	27.40	20P	47.50	52.40
11P	25.00	29.90			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm PITCH					
mm		3:1		1 of 1							
Draw BY:				Approved :				HOUSING			
LIZQ				GONGYB							
General Tolerance						DRAW NO : A2502HWV-XP					
x.xx±0.25 x.xx±0.20 x.xxx±0.15											
0		ANGLE±				REV					
						A0					