
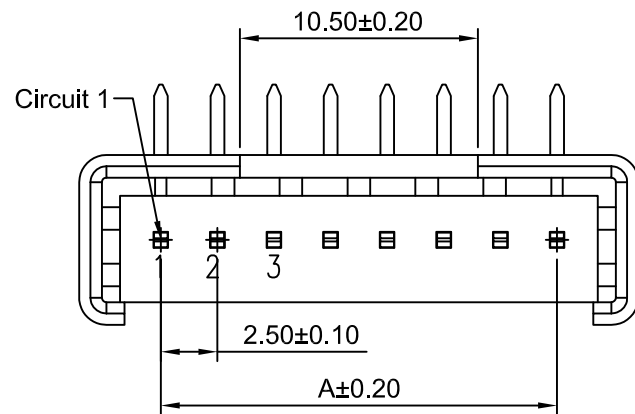
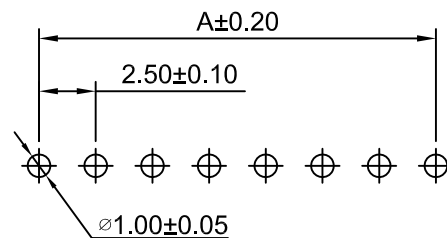
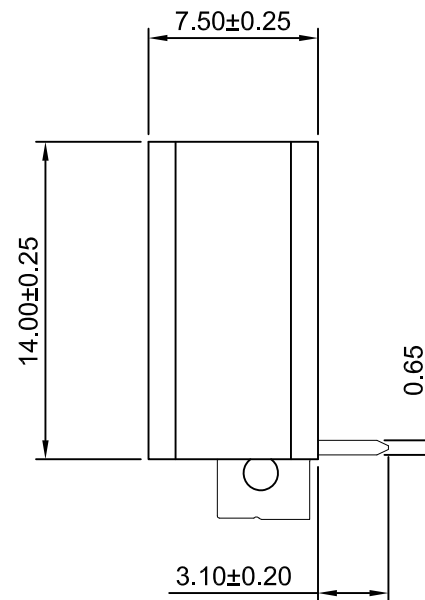


2P

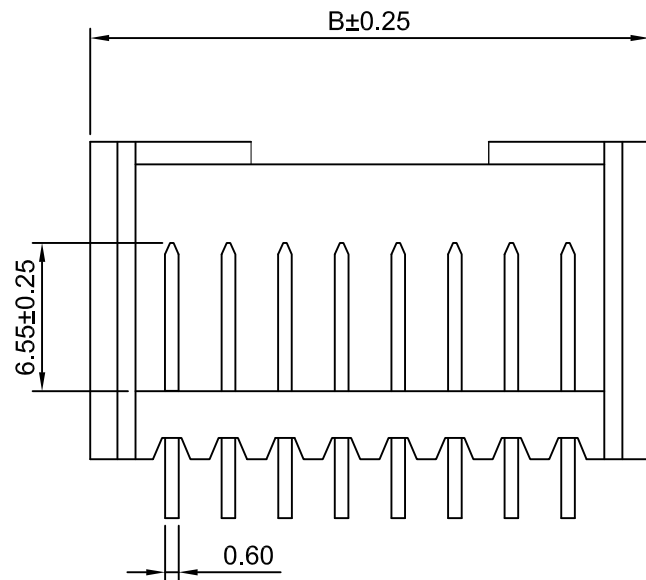

P.C.B LAYOUT

Ordering Information:

A2502WRA-N-XP - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(blank) - PBT+30%GF,UL94V-0

GWT - PBT+30%GF,UL94V-0,GWT 750°C

3.Color:

(blank) - Gray

BK - Black

RD - Red

BL - Blue

4.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT+30%GF,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	9.70	12P	27.50	34.70
3P	5.00	12.20	13P	30.00	37.20
4P	7.50	14.70	14P	32.50	39.70
5P	10.00	17.20	15P	35.00	42.20
6P	12.50	19.70	16P	37.50	44.70
7P	15.00	22.20	17P	40.00	47.20
8P	17.50	24.70	18P	42.50	49.70
9P	20.00	27.20	19P	45.00	52.20
10P	22.50	29.70	20P	47.50	54.70
11P	25.00	32.20			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Title :

2.50mm Pitch

Draw By:	Approved :
Diankui Wan	Jack Yin

90° Wafer

General Tolerance

REV	DESCRIPTION	DATE
A1	CHANGE THE INFORMATION	2019.11.14
A0	NEW RELEASE	2017.09.15

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A2502WRA-N-XP	REV A1
-------------------------	--------