
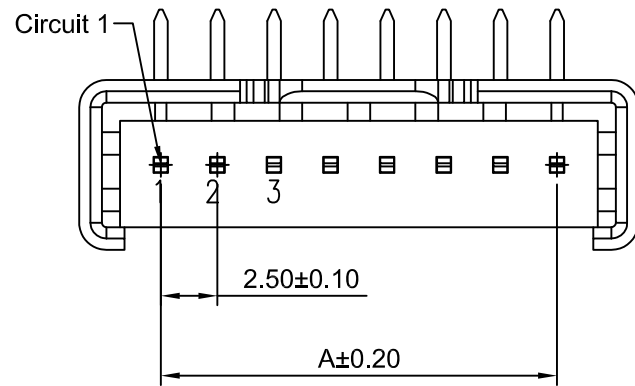
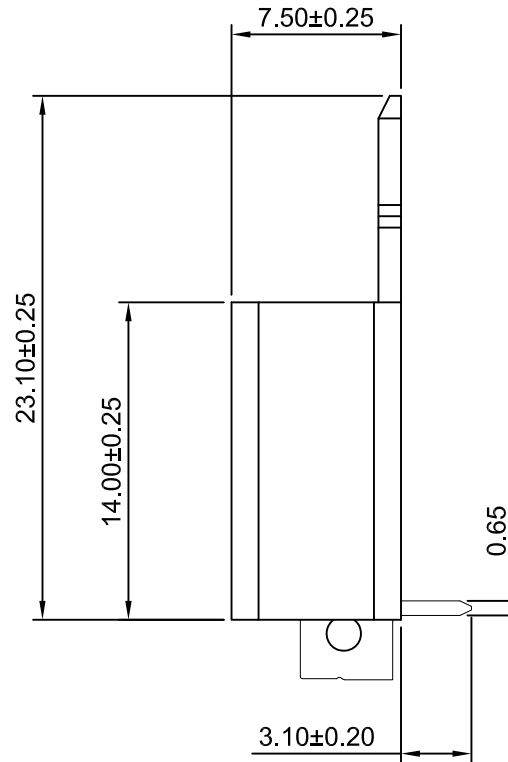


P.C.B LAYOUT

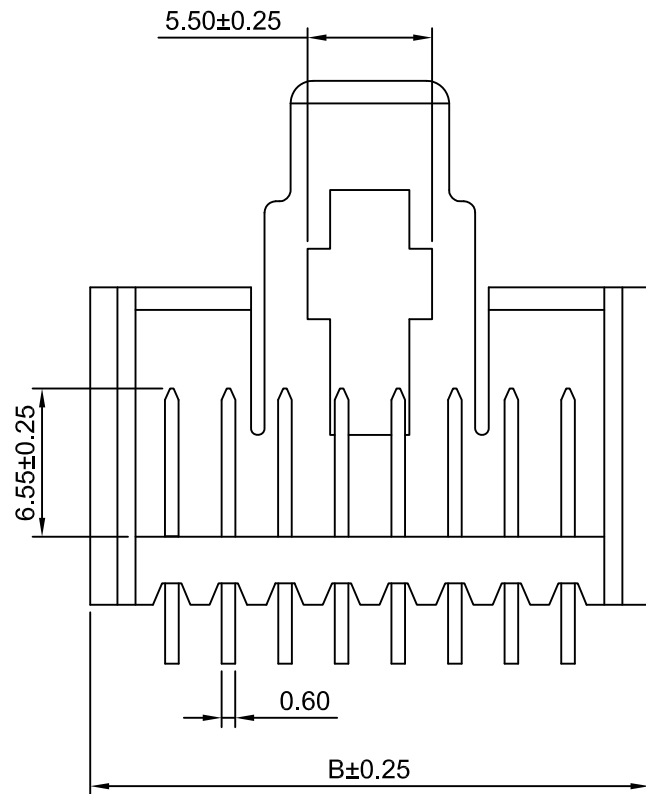

Ordering Information:

A2502WRA-XP - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(blank) - PBT+30%GF,UL94V-0

GWT - PBT+30%GF,UL94V-0,GWT 750℃

3.Color:

(blank) - Gray

BK - Black

RD - Red

BL - Blue

4.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT+30%GF,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	7.50	14.70	13P	30.00	37.20
5P	10.00	17.20	14P	32.50	39.70
6P	12.50	19.70	15P	35.00	42.20
7P	15.00	22.20	16P	37.50	44.70
8P	17.50	24.70	17P	40.00	47.20
9P	20.00	27.20	18P	42.50	49.70
10P	22.50	29.70	19P	45.00	52.20
11P	25.00	32.20	20P	47.50	54.70
12P	27.50	34.70			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm Pitch 90° Wafer			
mm		3:1		1 of 1					
Draw By:			Approved :						
Diankui Wan			Jack Yin						
General Tolerance									
x.x±0.25		PROJECT							
x.xx±0.20									
x.xxx±0.15									
						DRAW NO : A2502WRA-XP		REV A1	