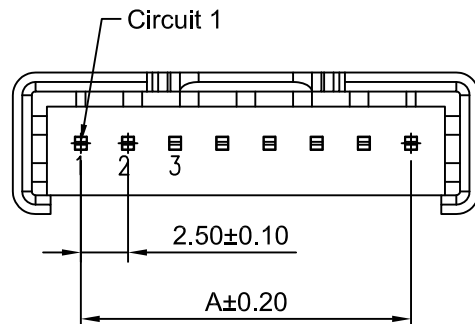


Ordering Information:
A2502WVB-XP - *** - *** - *** - ***
 1 2 3 4 5



1.Part No.
 2.Style:
(Blank):TYPE 1
 2:TYPE 2
 3.Material:
(blank) - PBT+30%GF,UL94V-0
GWT - PBT+30%GF,UL94V-0,GWT 750 °C
 4.Color:
(blank) - Gray
BK - Black RD - Red
BL - Blue
 5.Finish:
(blank) - Tin over Nickel
G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin over Nickel
 Material: PBT+30%GF,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	7.50	14.70	13P	30.00	37.20
5P	10.00	17.20	14P	32.50	39.70
6P	12.50	19.70	15P	35.00	42.20
7P	15.00	22.20	16P	37.50	44.70
8P	17.50	24.70	17P	40.00	47.20
9P	20.00	27.20	18P	42.50	49.70
10P	22.50	29.70	19P	45.00	52.20
11P	25.00	32.20	20P	47.50	54.70
12P	27.50	34.70			

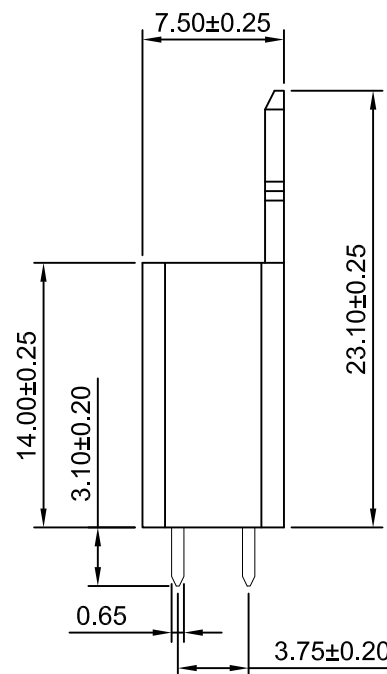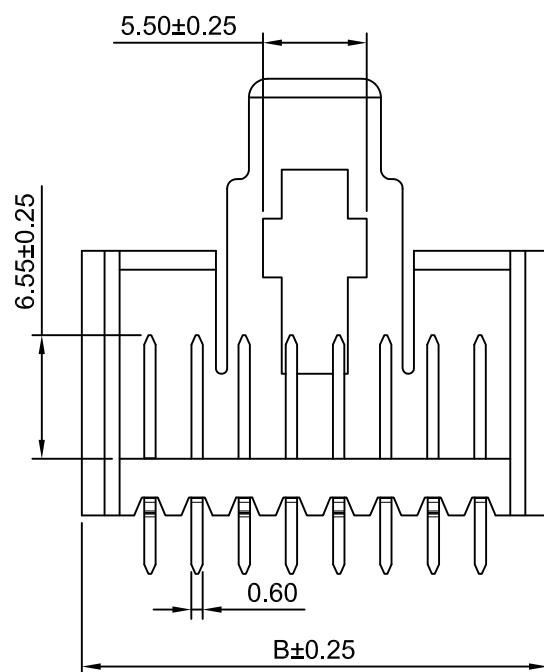

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	Title : 2.50mm Pitch 180° Wafer		
mm	2.5:1	1 of 1			
Draw By:		Approved :			
Diankui Wan		Jack Yin			
General Tolerance					
PROJECT					
x, x±0.25 x, xx±0.20 x, xxx±0.15					
					
DRAW NO :			A2502WVB-XP		REV A1