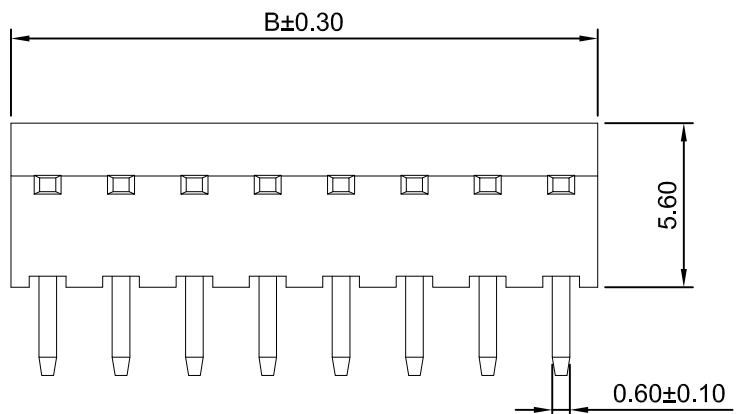
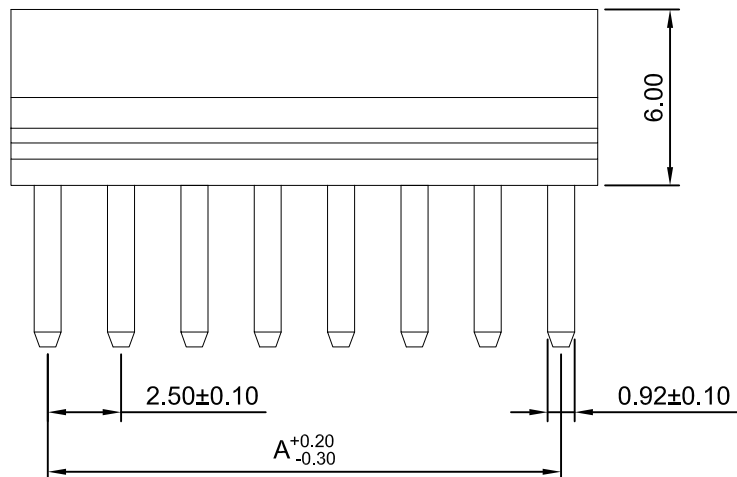


P.C.B LAYOUT

Ordering Information:


A2504WR-XP - **
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

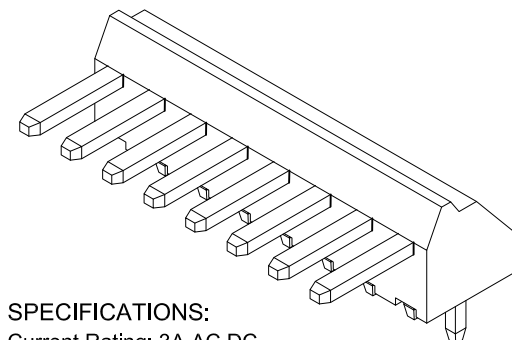

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40C ~ +105°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.00	12P	27.50	30.00
3P	5.00	7.50	13P	30.00	32.50
4P	7.50	10.00	14P	32.50	35.00
5P	10.00	12.50	15P	35.00	37.50
6P	12.50	15.00	16P	37.50	40.00
7P	15.00	17.50	17P	40.00	42.50
8P	17.50	20.00	18P	42.50	45.00
9P	20.00	22.50	19P	45.00	47.50
10P	22.50	25.00	20P	47.50	50.00
11P	25.00	27.50			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE 2.50mm PITCH RIGHT ANGLE WAFER		
mm	4:1	1 of 1			
DRWN	CHKD	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2504WR-XP		REV A0
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					

A0	NEW RELEASE	2022.09.15
REV	DESCRIPTION	DATE