

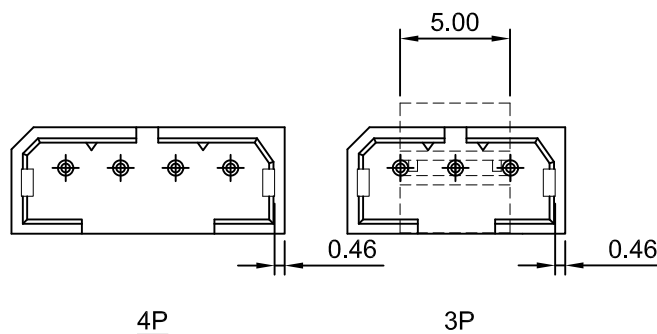
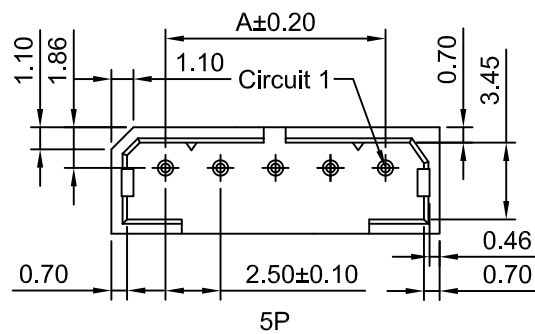
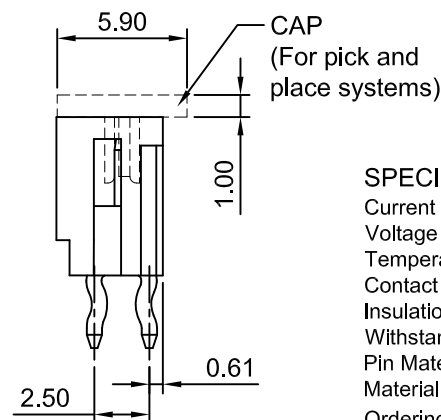



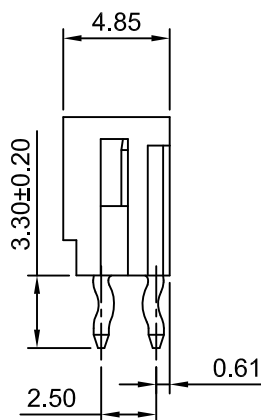

Ordering Information:

A2505WVA-XP-LCP - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{***}{4}$

- Part NO.
- Halogen:
(Blank): Normal Material
HF: Halogen Free
- Color:
(Blank): Ivory
BK: Black
- Packing:
(Blank): Bag
CRE: Tape & Reel with cap

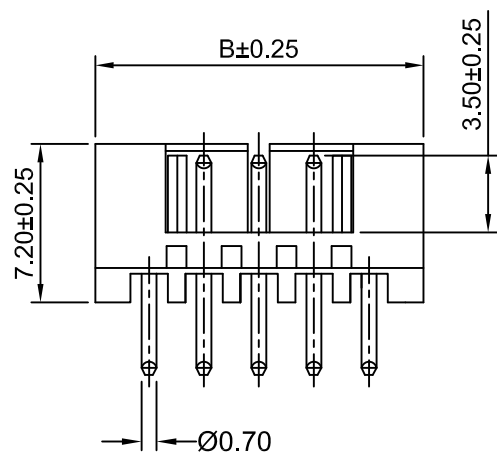


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP, UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2505WVA-3P-LCP	5.00	9.96
A2505WVA-4P-LCP	7.50	12.46
A2505WVA-5P-LCP	10.00	14.96

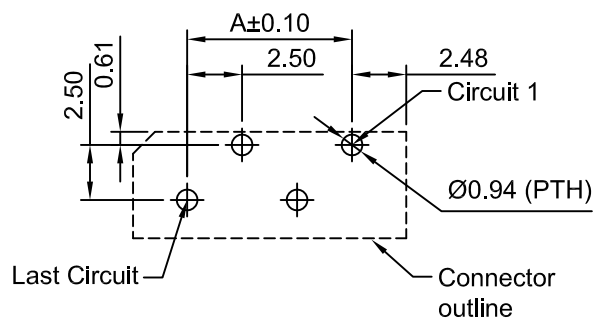

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

			Unit	Scale	Sheet	TITLE	
A5	CHANGE THE DRAWING	2023.04.15	mm	3:1	1 of 1	2.50mm PITCH VERTICAL SINGLE ROW DIP HEADER	
A4	CHANGE THE DRAWING	2022.12.01	DRAWN	CHK'D	APPR		
A3	CHANGE THE DRAWING	2022.07.27	Haisen Li	DianKui Wan	Jack Yin		
A2	CHANGE THE DRAWING	2022.03.11	General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2505WVA-XP-LCP	
A1	CHANGE THE DRAWING	2021.12.30	x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°				
A0	NEW RELEASE	2021.08.04					
REV	DESCRIPTION	DATE				REV A5	