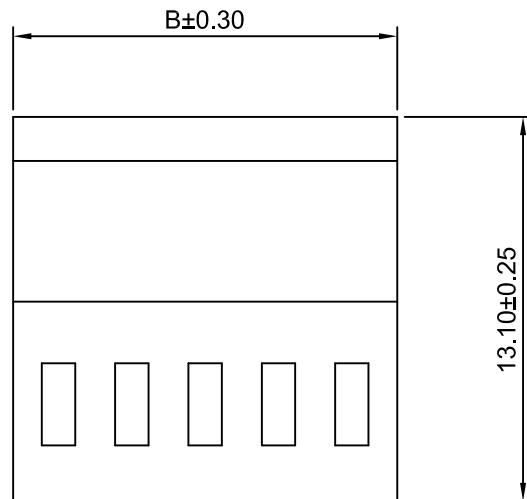
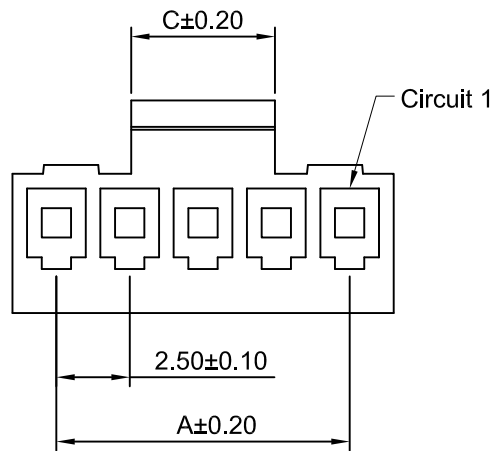


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0 (Pink)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	5.50	2.00	9P	20.00	23.00	10.00
3P	5.00	8.00	3.00	10P	22.50	25.50	10.00
4P	7.50	10.50	4.00	11P	25.00	28.00	11.00
5P	10.00	13.00	5.00	12P	27.50	30.50	11.00
6P	12.50	15.50	6.00	13P	30.00	33.00	13.00
7P	15.00	18.00	8.00	14P	32.50	35.50	13.00
8P	17.50	20.50	10.00	15P	35.00	38.00	13.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yln

Title :
2.50mm PITCH

HOUSING

General Tolerance	
A1	CHANGE THE Drawing
A0	NEW RELEASE
REV	DESCRIPTION

2020.01.11	x.xx≤0.25	ANGLE±
2005.05.10	x.xx≤0.20	
	x.xxx≤0.15	

DRAW NO : **A2506H-XP**

REV
A1