
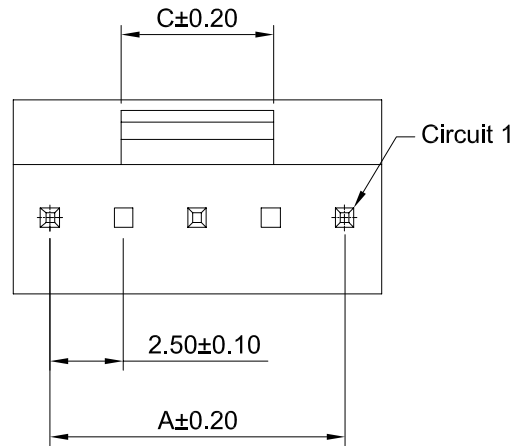
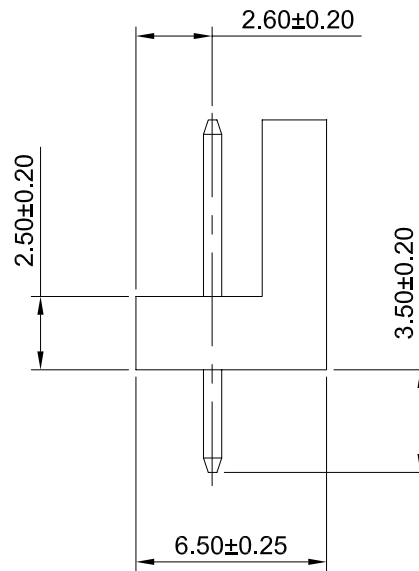


P.C.B LAYOUT

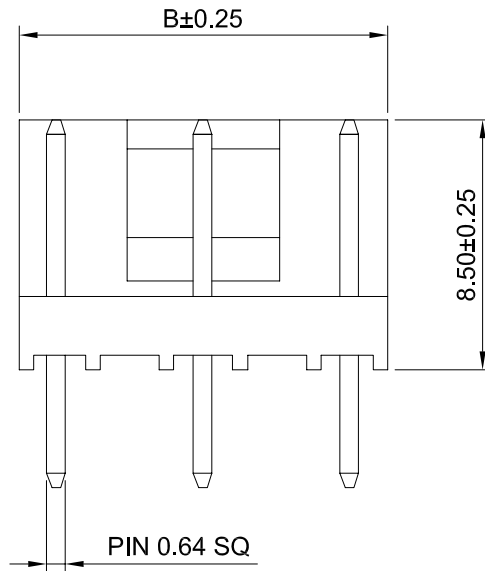

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Pink)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3P	5.00	7.50	3.20	11P	25.00	27.50	11.20
5P	10.00	12.50	5.20	13P	30.00	32.50	13.20
7P	15.00	17.50	8.20	15P	35.00	37.50	13.20
9P	20.00	22.50	10.20				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
2.50mm PITCH
180° WAFER

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

General Tolerance	
x.xx $\leq$ 0.25	ANGLE $\pm$
x.xx $\leq$ 0.20	
x.xxx $\leq$ 0.15	

DRAW NO : A2506WV-XP-A

REV
A0