

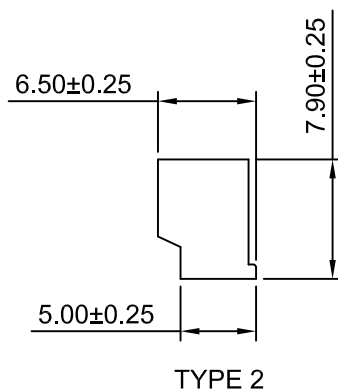
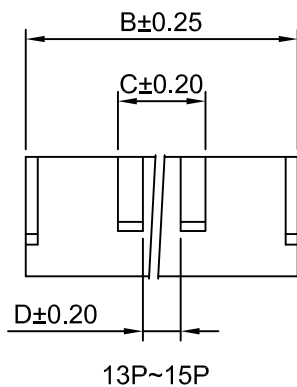






2P,3P



4P~6P



7P~15P

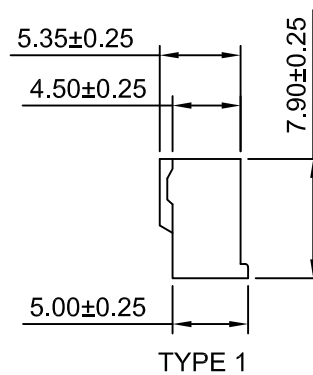

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

Ordering Information:

A2507H-XP - ***


1 2

1.Part No.

2.Style:

(blank): TYPE 1

2: TYPE 2



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Brown)

Ordering Information & Dimensions

Part No.	Dimensions(mm)			
	A	B	C	D
A2507H-2P	2.50	5.50	1.40	---
A2507H-3P	5.00	8.00	1.90	---
A2507H-4P	7.50	10.50	2.40	---
A2507H-5P	10.00	13.00	2.90	---
A2507H-6P	12.50	15.50	3.40	---
A2507H-7P	15.00	18.00	5.90	2.50
A2507H-8P	17.50	20.50	8.40	5.00
A2507H-9P	20.00	23.00	10.90	7.50
A2507H-10P	22.50	25.50	13.40	10.00
A2507H-11P	25.00	28.00	15.90	12.50
A2507H-12P	27.50	30.50	18.40	15.00
A2507H-13P	30.00	33.00	20.90	17.50
A2507H-14P	32.50	35.50	23.40	20.00
A2507H-15P	35.00	38.00	25.90	22.50
A2507H-16P	37.50	40.50	28.40	25.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.50mm PITCH HOUSING	
DRN	CHK	APVD		
Dengchun Yi	DianKui Wan	Jack Yin		
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2507H-XP	A0