
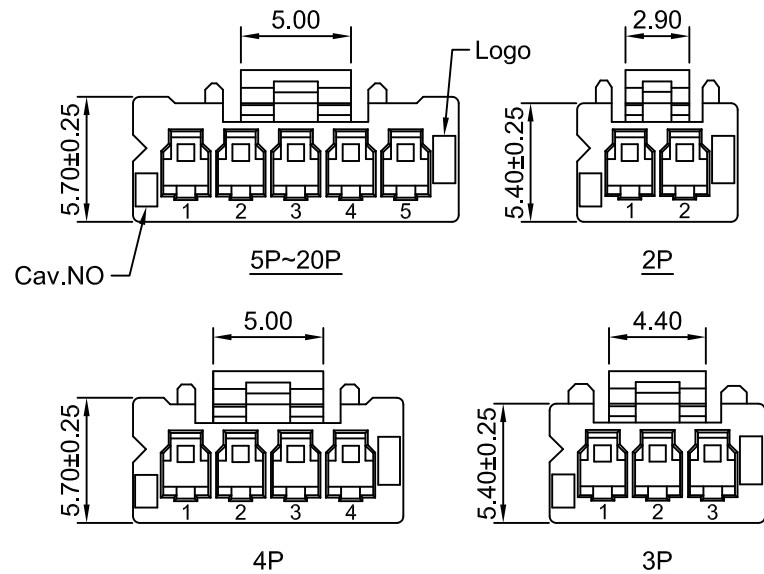

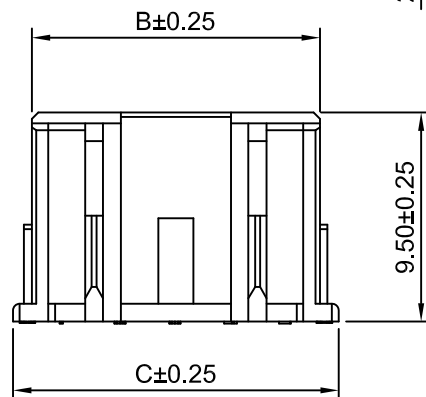


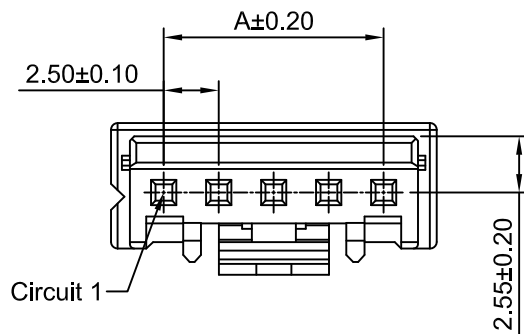

Ordering Information:

A2508H-XP - $\frac{***}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK: Black RD: Red

BL: Blue YL: Yellow


GN: Green OR: Orange

BR: Brown GY: Gray

PK: Pink LY: Lemon yellow

P: Purple LE: Light blue

FY: Vivid yellow



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2508H-2P	2.50	5.60	7.30
A2508H-3P	5.00	8.10	9.80
A2508H-4P	7.50	10.60	12.30
A2508H-5P	10.00	13.10	14.80
A2508H-6P	12.50	15.60	17.30
A2508H-7P	15.00	18.10	19.80
A2508H-8P	17.50	20.60	22.30
A2508H-9P	20.00	23.10	24.80
A2508H-10P	22.50	25.60	27.30
A2508H-11P	25.00	28.10	29.80
A2508H-12P	27.50	30.60	32.30
A2508H-13P	30.00	33.10	34.80
A2508H-14P	32.50	35.60	37.30
A2508H-15P	35.00	38.10	39.80
A2508H-18P	42.50	45.60	47.30
A2508H-20P	47.50	50.60	52.30

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHKD	APPR	2.50mm PITCH HOUSING	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2508H-XP	REV A4
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				

A4	CHANGE THE DRAWING	2021.03.02
A3	ADD THE DRAWING OF 2P~4P	2021.01.05
A2	CHANGE THE INSULATION RESISTANCE	2020.02.27
A1	CHANGE THE DRAWING	2019.04.22
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE