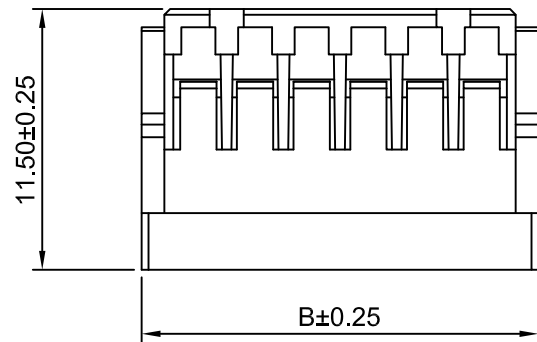

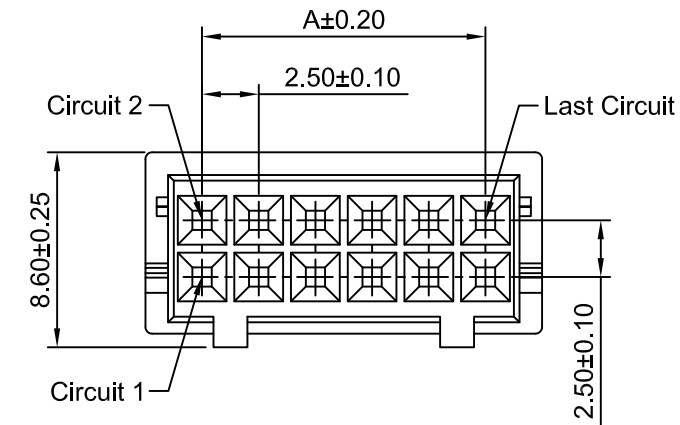


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508HA-2x2P	2.50	7.50
A2508HA-2x3P	5.00	10.00
A2508HA-2x4P	7.50	12.50
A2508HA-2x5P	10.00	15.00
A2508HA-2x6P	12.50	17.50
A2508HA-2x7P	15.00	20.00
A2508HA-2x8P	17.50	22.50
A2508HA-2x9P	20.00	25.00
A2508HA-2x10P	22.50	27.50
A2508HA-2x11P	25.00	30.00
A2508HA-2x12P	27.50	32.50
A2508HA-2x13P	30.00	35.00
A2508HA-2x14P	32.50	37.50
A2508HA-2x15P	35.00	40.00
A2508HA-2x16P	37.50	42.50
A2508HA-2x17P	40.00	45.00
A2508HA-2x18P	42.50	47.50
A2508HA-2x19P	45.00	50.00
A2508HA-2x20P	47.50	52.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 3:1	Sheet 1 of 1	Title : 2.50mm Pitch	
Draw By: Diankui Wan			Approved : Jack Yin	
General Tolerance			Dual Row Housing	
A0	NEW RELEASE	2016.09.22		
REV	DESCRIPTION	DATE	DRAW NO : A2508HA-2xXP	
			REV A0	

			x.x±0.30 x.xx±0.20 x.xxx±0.05	PROJECT