


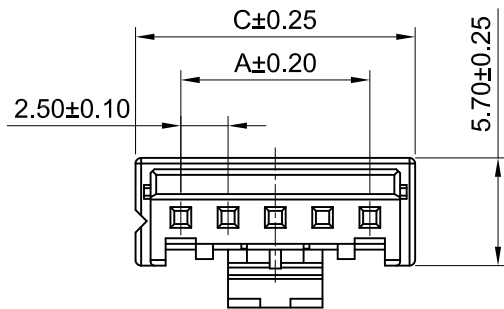

Ordering Information:

A2508HA-XP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0 (Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material







BK: Black

BL: Blue

GN: Green

RD: Red

YL: Yellow

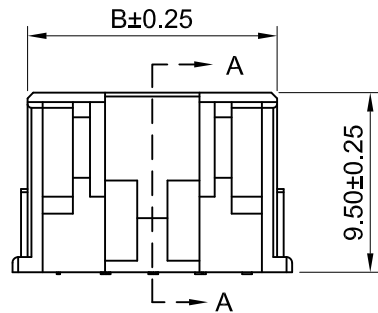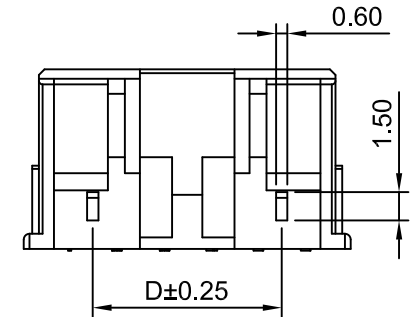

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C






Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2508HA-2P	2.50	5.60	7.30	---
A2508HA-3P	5.00	8.10	9.80	---
A2508HA-4P	7.50	10.60	12.30	---
A2508HA-5P	10.00	13.10	14.80	---
A2508HA-6P	12.50	15.60	17.30	10.00
A2508HA-7P	15.00	18.10	19.80	10.00
A2508HA-8P	17.50	20.60	22.30	12.50
A2508HA-9P	20.00	23.10	24.80	15.00
A2508HA-10P	22.50	25.60	27.30	17.50
A2508HA-11P	25.00	28.10	29.80	20.00
A2508HA-12P	27.50	30.60	32.30	22.50
A2508HA-13P	30.00	33.10	34.80	25.00
A2508HA-14P	32.50	35.60	37.30	27.50
A2508HA-15P	35.00	38.10	39.80	30.00
A2508HA-18P	42.50	45.60	47.30	37.50
A2508HA-20P	47.50	50.60	52.30	42.50

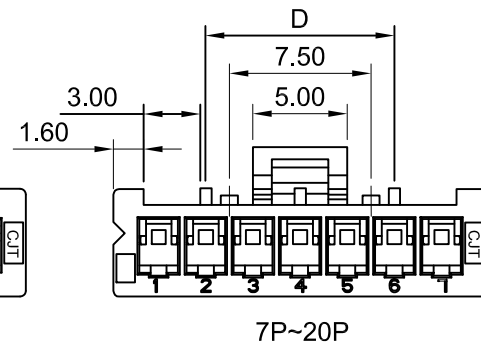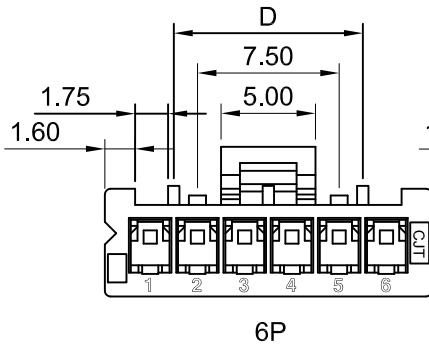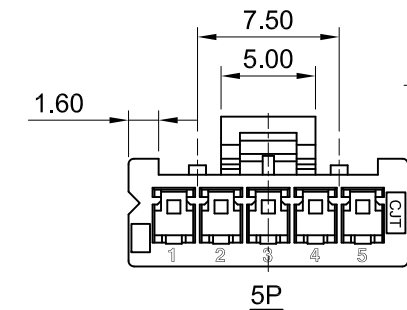

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.50mm PITCH HOUSING	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO.	REV
x,xx±0.25			A2508HA-XP	A2
x,xxx±0.20				
x,xxxx±0.15				
ANGLES ±1°				