


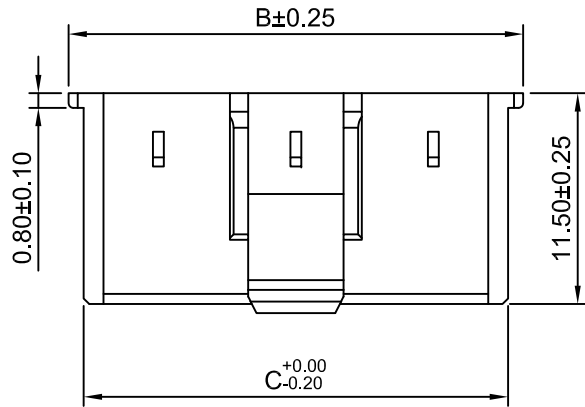
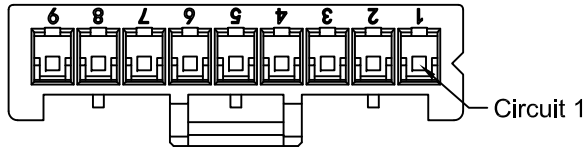

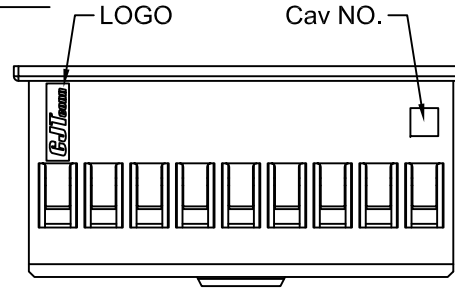




9P~16P

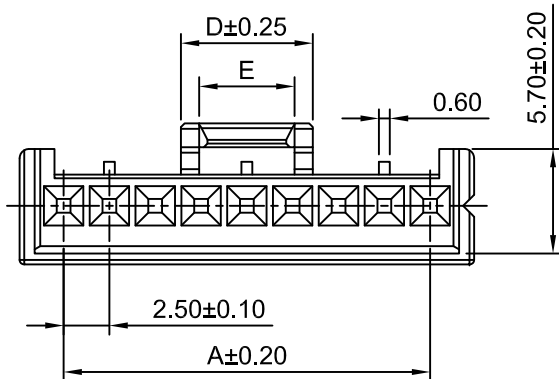

2P~5P



6P~8P

Ordering Information:

A2508HB-XP - $\frac{**}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0 ,IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank) :White

BK:Black

RD :Red

BL :Blue

YL :Yellow

GN :Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	D	E
A2508HB-2P	2.50	8.90	7.20	4.30	2.70
A2508HB-3P	5.00	9.90	8.20	4.70	2.70
A2508HB-4P	7.50	12.40	10.70	7.20	5.20
A2508HB-5P	10.00	14.90	13.20	7.20	5.20
A2508HB-6P	12.50	17.40	15.70	7.20	5.20
A2508HB-7P	15.00	19.90	18.20	7.20	5.20
A2508HB-8P	17.50	22.40	20.70	7.20	5.20
A2508HB-9P	20.00	24.90	23.20	7.20	5.20
A2508HB-10P	22.50	27.40	25.70	7.20	5.20
A2508HB-11P	25.00	29.90	28.20	7.20	5.20
A2508HB-12P	27.50	32.40	30.70	7.20	5.20
A2508HB-13P	30.00	34.90	33.20	7.20	5.20
A2508HB-14P	32.50	37.40	35.70	7.20	5.20
A2508HB-15P	35.00	39.90	38.20	7.20	5.20
A2508HB-16P	37.50	42.40	40.70	7.20	5.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.50mm PITCH HOUSING	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	DjianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO. A2508HB-XP	REV A0
x.xxx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				