

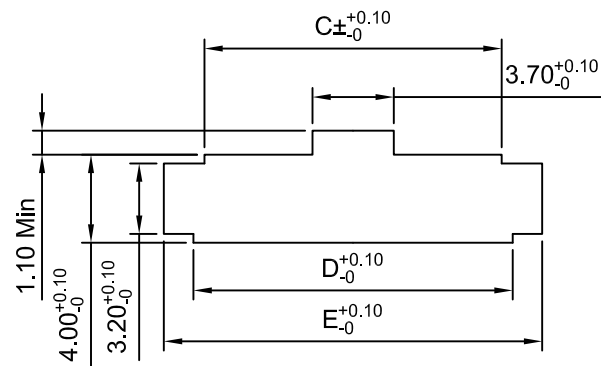
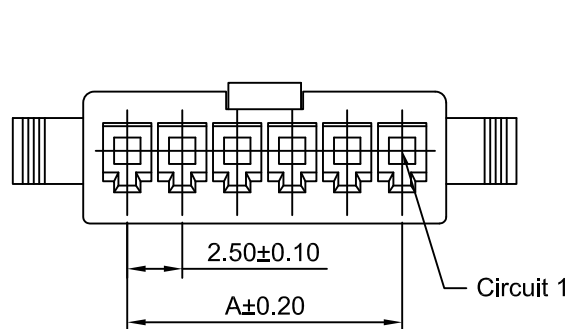
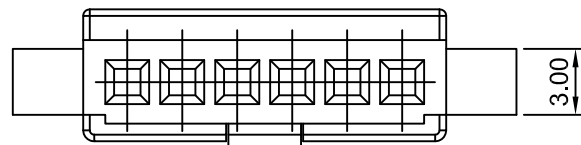


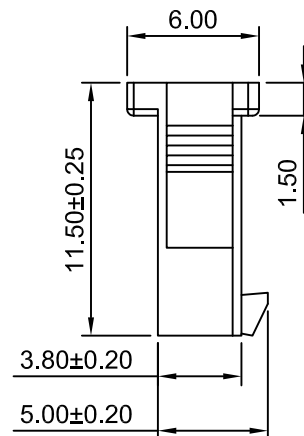

RECOMMENDED PANEL CUT-OUT
PANEL THICKNESS 0.50~2.00mm

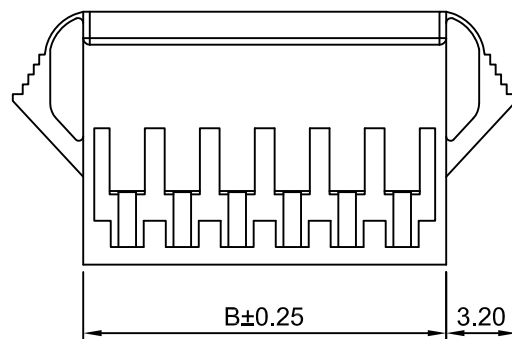

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)						
	A	B	C	D	E		
					Panel Board Thickness		
					0.5 to 1.2	1.3 to 1.6	1.7 to 2.0
A2508HE-2P	2.50	6.50	4.70	6.70	10.80	11.30	12.00
A2508HE-3P	5.00	9.00	7.20	9.20	13.30	13.80	14.50
A2508HE-4P	7.50	11.50	9.70	11.70	15.80	16.30	17.00
A2508HE-5P	10.00	14.00	12.20	14.20	18.30	18.80	19.50
A2508HE-6P	12.50	16.50	14.70	16.70	20.80	21.30	22.00
A2508HE-7P	15.00	19.00	17.20	19.20	23.30	23.80	24.50
A2508HE-8P	17.50	21.50	19.70	21.70	25.80	26.30	27.00
A2508HE-9P	20.00	24.00	22.20	24.20	28.30	28.80	29.50
A2508HE-10P	22.50	26.50	24.70	26.70	30.80	31.30	32.00
A2508HE-11P	25.00	29.00	27.20	29.20	33.30	33.80	34.50
A2508HE-12P	27.50	31.50	29.70	31.70	35.80	36.30	37.00
A2508HE-13P	30.00	34.00	32.20	34.20	38.30	38.80	39.50
A2508HE-14P	32.50	36.50	34.70	36.70	40.80	41.30	42.00
A2508HE-15P	35.00	39.00	37.20	39.20	43.30	43.80	44.50
A2508HE-16P	37.50	41.50	39.70	41.70	45.80	46.30	47.00
A2508HE-17P	40.00	44.00	42.20	44.20	48.30	48.80	49.50
A2508HE-18P	42.50	46.50	44.70	46.70	50.80	51.30	52.00
A2508HE-19P	45.00	49.00	47.20	49.20	53.30	53.80	54.50
A2508HE-20P	47.50	51.50	49.70	51.70	55.80	56.30	57.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1		2.50mm PITCH HOUSING	
DRAWN		CHK'D		APPR			
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x,xx±0.25						A2508HE-XP	
x,xxx±0.20							
x,xxxx±0.15							
ANGLES ±1°						REV A0	

A0	NEW RELEASE	2022.10.25
REV	DESCRIPTION	DATE