



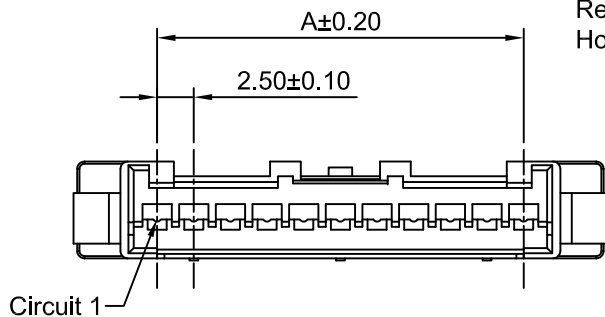


Receptacle
Housing outline

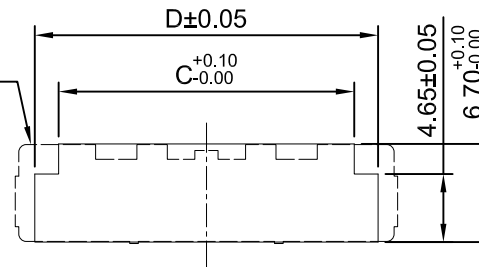

RECOMMENDED PANEL CUT-OUT


(DESIGNED FOR 0.50mm TO 1.80mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)





2P~5P

Ordering Information:


- A2508HM-XP - *** - ***
1 2 3
- Part NO.
 - Material:
(Blank): Nylon 66,UL94V-0
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
 - Color:
(Blank): White
BL: Blue
RD: Red

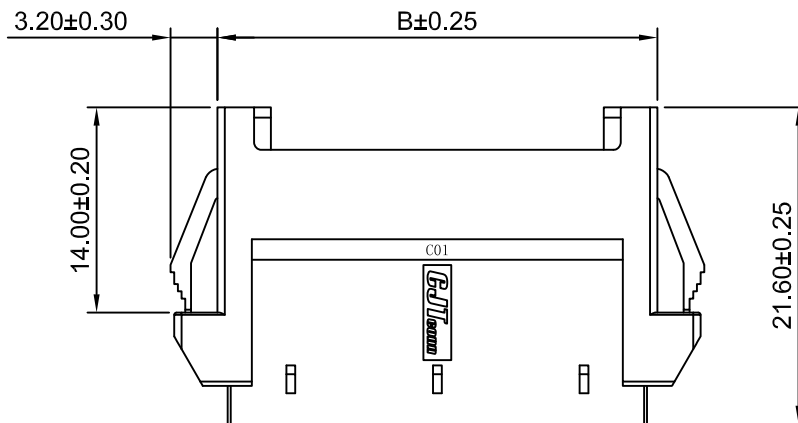

9P~15P

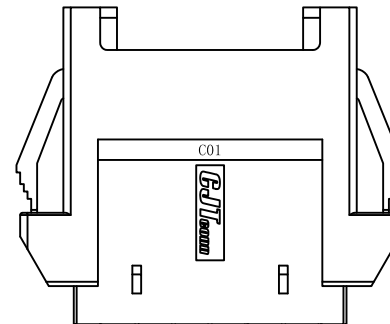

6P~8P

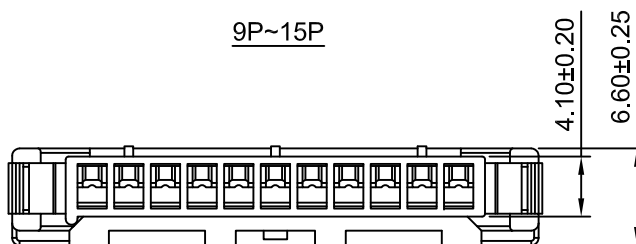

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2508HM-2P	2.50	7.50	7.90	11.20
A2508HM-3P	5.00	10.00	10.40	13.70
A2508HM-4P	7.50	12.50	12.90	16.20
A2508HM-5P	10.00	15.00	15.40	18.70
A2508HM-6P	12.50	17.50	17.90	21.20
A2508HM-7P	15.00	20.00	20.40	23.70
A2508HM-8P	17.50	22.50	22.90	26.20
A2508HM-9P	20.00	25.00	25.40	28.70
A2508HM-10P	22.50	27.50	27.90	31.20
A2508HM-11P	25.00	30.00	30.40	33.70
A2508HM-12P	27.50	32.50	32.90	36.20
A2508HM-13P	30.00	35.00	35.40	38.70
A2508HM-14P	32.50	37.50	37.90	41.20
A2508HM-15P	35.00	40.00	40.40	43.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	2.50mm PITCH HOUSING	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO. A2508HM-XP
A1	JL-GC-ECN00416	2024.11.20		
A0	NEW RELEASE	2021.11.17		REV A1
REV	DESCRIPTION	DATE		