

P.C.B LAYOUT  
TOLERANCE:±0.05

Ordering Information:





A2508HMB-2x9P - \*\* - \*\*  
1 2 3

- Part No.
- Material:  
(Blank):Nylon 66,UL94V-0  
GWT:Nylon 66,UL94V-0 ,IEC 60335-1,5th Edition Glow Wire Capable.
- Color:

- (Blank) :White
- BK:Black
- RD :Red
- BL :Blue
- YL :Yellow
- GN :Green

SPECIFICATIONS:

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: 10mΩ Max.
- Insulation Resistance: 500MΩ Min.
- Withstanding Voltage: 1500V AC/minute
- Material: Nylon 66,UL94V-0

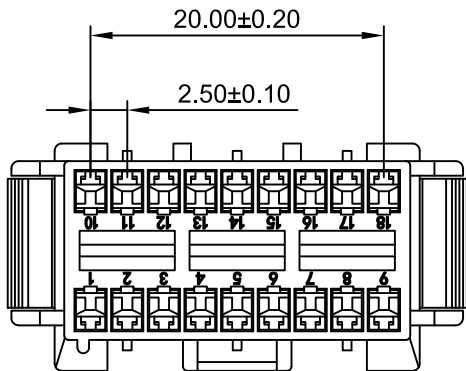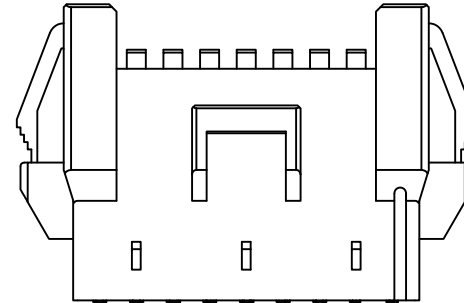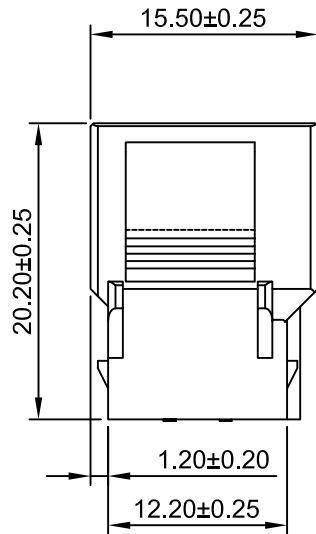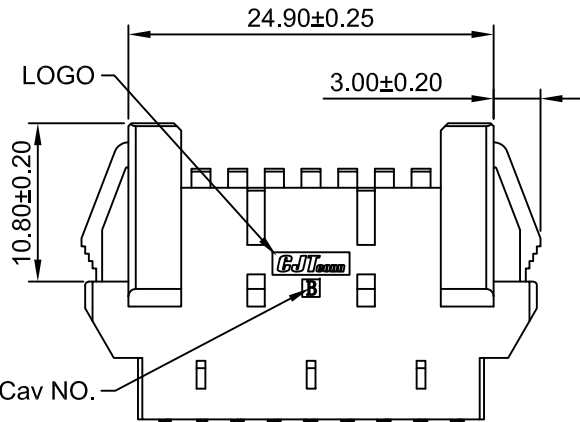

<b>CJTconn</b> CHANGJIANG CONNECTORS CO.,LTD.			TITLE	2.50mm PITCH HOUSING	DRAWING NO. A2508HMB-2x9P	REV A0
Unit	Scale	Sheet	1 of 1			
mm	2:1					
DRWN	CHK'D	APPR				
Dengchun Yi	Dlankul Wan	Jack Yin				
General Tolerances	THIRD ANGLE PROJECTION					
x.xx±0.25						
x.xxx±0.20						
x.xxxx±0.15						
ANGLES ±1°						

A0	NEW RELEASE	2021.09.25
REV	DESCRIPTION	DATE