

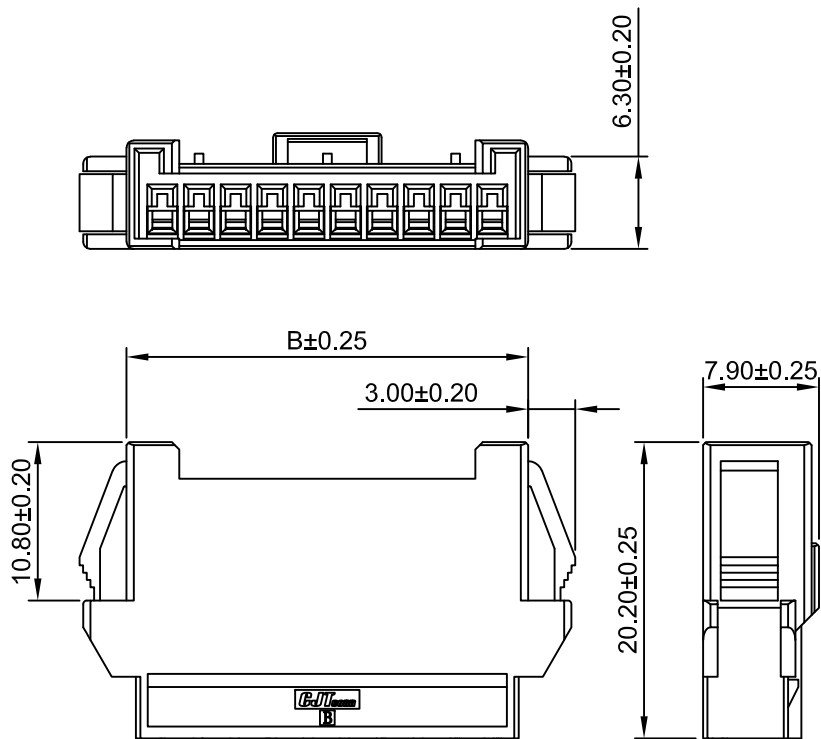


2P-5P

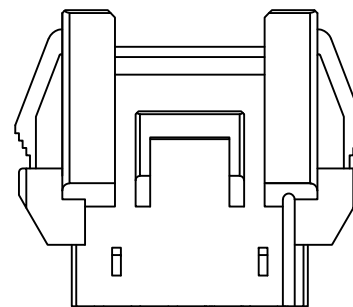

6P-8P

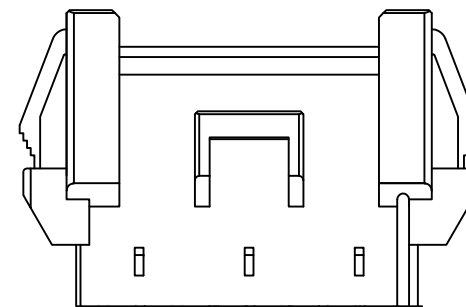

9P-16P

Ordering Information:

A2508HMB-XP - $\frac{**}{1} - \frac{**}{2} - \frac{**}{3}$

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0 ,IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank) :White

BK:Black

RD :Red

BL :Blue

YL :Yellow

GN :Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.


Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1500V AC/minute


Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2508HMB-2P	2.50	8.90	9.30	12.60
A2508HMB-3P	5.00	9.90	10.30	13.60
A2508HMB-4P	7.50	12.40	12.80	16.10
A2508HMB-5P	10.00	14.90	15.30	18.60
A2508HMB-6P	12.50	17.40	17.80	21.10
A2508HMB-7P	15.00	19.90	20.30	23.60
A2508HMB-8P	17.50	22.40	22.80	26.10
A2508HMB-9P	20.00	24.90	25.30	28.60
A2508HMB-10P	22.50	27.40	27.80	31.10
A2508HMB-11P	25.00	29.90	30.30	33.60
A2508HMB-12P	27.50	32.40	32.80	36.10
A2508HMB-13P	30.00	34.90	35.30	38.60
A2508HMB-14P	32.50	37.40	37.80	41.10
A2508HMB-15P	35.00	39.90	40.30	43.60
A2508HMB-16P	37.50	42.40	42.80	46.10

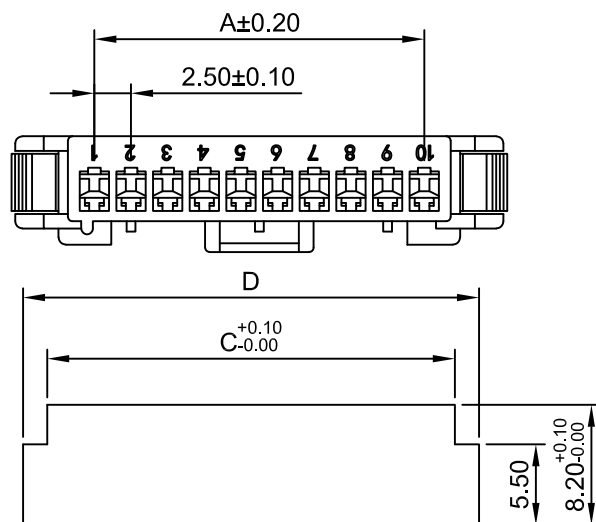

P.C.B LAYOUT
TOLERANCE:±0.05



CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	2.50mm PITCH HOUSING
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV
A0		NEW RELEASE	A0
REV		DESCRIPTION	DATE