







2P-5P



6P-8P

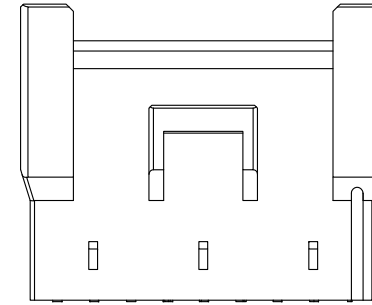

9P-16P

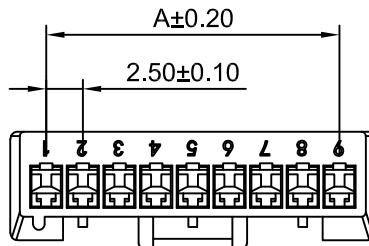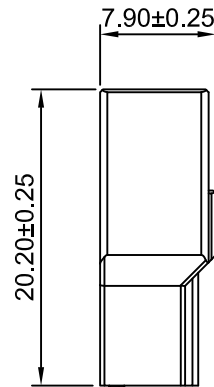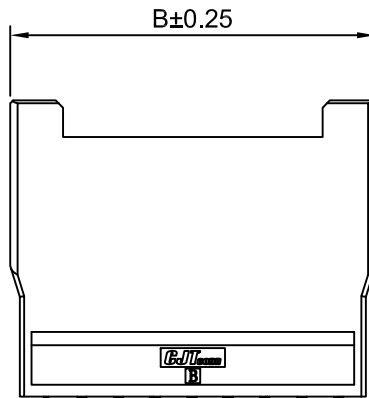

Ordering Information:

A2508HMC-XP - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0 ,IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank) :White

BK:Black

RD :Red

BL :Blue

YL :Yellow

GN :Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508HMC-2P	2.50	8.90
A2508HMC-3P	5.00	9.90
A2508HMC-4P	7.50	12.40
A2508HMC-5P	10.00	14.90
A2508HMC-6P	12.50	17.40
A2508HMC-7P	15.00	19.90
A2508HMC-8P	17.50	22.40
A2508HMC-9P	20.00	24.90
A2508HMC-10P	22.50	27.40
A2508HMC-11P	25.00	29.90
A2508HMC-12P	27.50	32.40
A2508HMC-13P	30.00	34.90
A2508HMC-14P	32.50	37.40
A2508HMC-15P	35.00	39.90
A2508HMC-16P	37.50	42.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	2.50mm PITCH HOUSING	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508HMC-XP	A0

A0	NEW RELEASE	2021.09.25
REV	DESCRIPTION	DATE