




6P

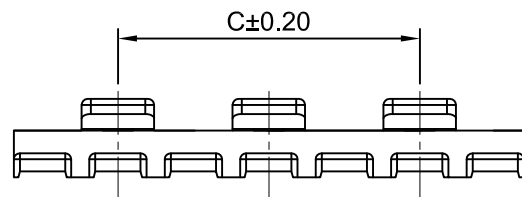

7P~20P

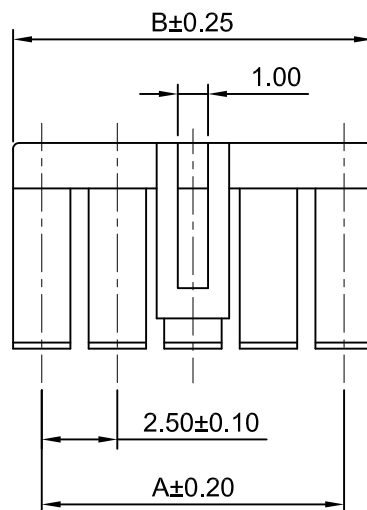

2P~5P



Ordering Information:

A2508SA-XP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0 (Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material


BK: Black

BL: Blue

GN: Green

RD: Red

YL: Yellow



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2508SA-2P	2.50	4.40	---
A2508SA-3P	5.00	6.90	---
A2508SA-4P	7.50	9.40	---
A2508SA-5P	10.00	11.90	---
A2508SA-6P	12.50	14.40	10.00
A2508SA-7P	15.00	16.90	10.00
A2508SA-8P	17.50	19.40	12.50
A2508SA-9P	20.00	21.90	15.00
A2508SA-10P	22.50	24.40	17.50
A2508SA-11P	25.00	26.90	20.00
A2508SA-12P	27.50	29.40	22.50
A2508SA-13P	30.00	31.90	25.00
A2508SA-14P	32.50	34.40	27.50
A2508SA-15P	35.00	36.90	30.00
A2508SA-18P	42.50	44.40	37.50
A2508SA-20P	47.50	49.40	42.50

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	2.50mm PITCH SEAL		
DRWN	CHK'D	APPR			
Wenmin Luo	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x,x±0.25			A2508SA-XP		A2
x,x,x±0.20					
x,x,x,x±0.15					
ANGLES ±1°					

REV
A2