
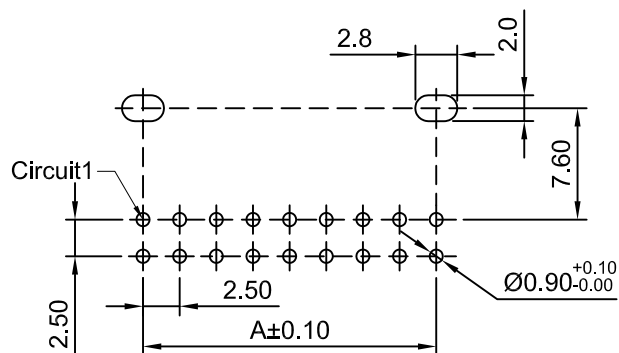
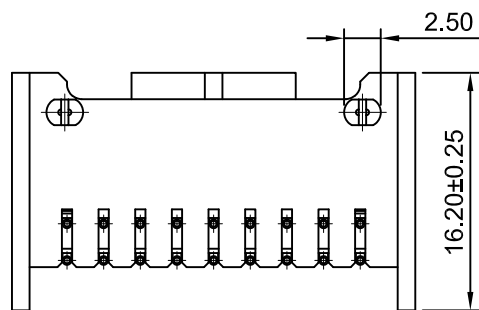


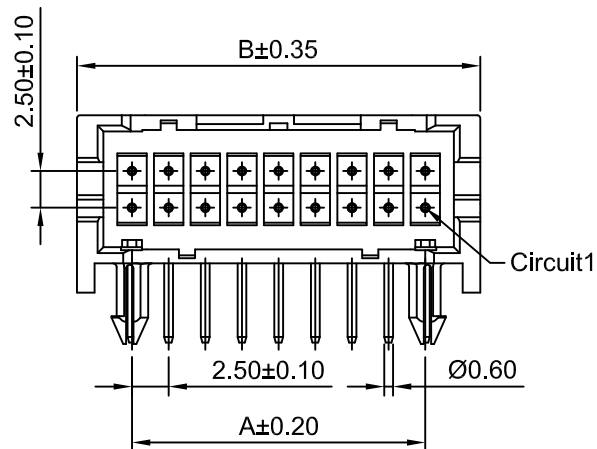

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2508WR-F-2xXP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Ivory)

9T:Nylon 9T,UL94V-0(Ivory)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:


(Blank): Tin over Nickel

G: Gold over Nickel

4.Logo:

(Blank): With CJT Logo

NK: Without CJT Logo



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508WR-F-2x4P	7.50	15.00
A2508WR-F-2x5P	10.00	17.50
A2508WR-F-2x6P	12.50	20.00
A2508WR-F-2x7P	15.00	22.50
A2508WR-F-2x8P	17.50	25.00
A2508WR-F-2x9P	20.00	27.50
A2508WR-F-2x10P	22.50	30.00
A2508WR-F-2x11P	25.00	32.50
A2508WR-F-2x12P	27.50	35.00
A2508WR-F-2x13P	30.00	37.50
A2508WR-F-2x14P	32.50	40.00
A2508WR-F-2x15P	35.00	42.50
A2508WR-F-2x16P	37.50	45.00
A2508WR-F-2x17P	40.00	47.50
A2508WR-F-2x18P	42.50	50.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.50mm Pitch Right angle Dual Row Wafer With Foot	
DRAWN	CHK'D	APPR	DRAWING NO.	
Chengbiao Ye	Djankui Wan	Jack Yin	A2508WR-F-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
A2 CHANGE THE DRAWING 2023.01.29			REV A2	
A1 CHANGE THE DRAWING 2022.11.03				
A0 NEW RELEASE 2022.08.20				
REV	DESCRIPTION	DATE		

A2	CHANGE THE DRAWING	2023.01.29
A1	CHANGE THE DRAWING	2022.11.03
A0	NEW RELEASE	2022.08.20
REV	DESCRIPTION	DATE

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

