

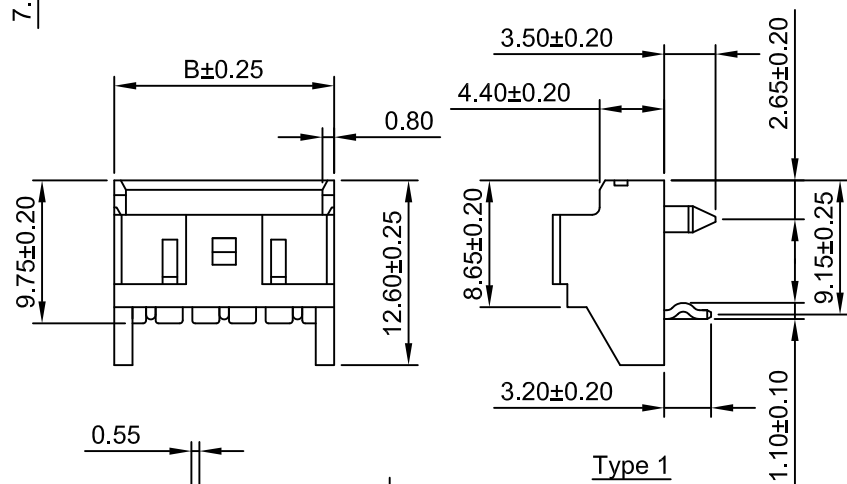
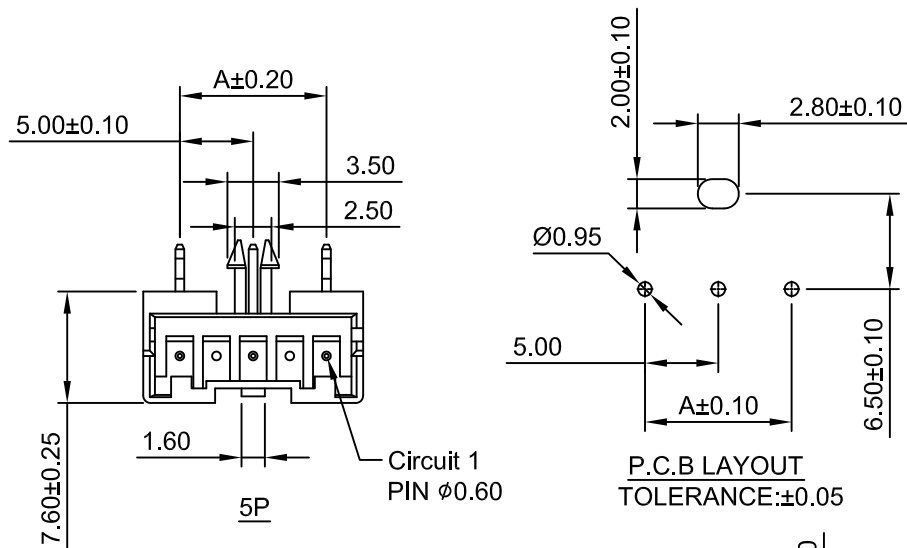
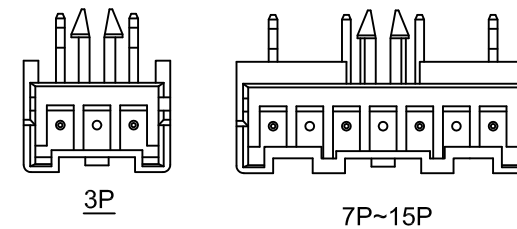


Ordering Information:
A2508WR-F-XP-A - $\frac{**}{2}$ - $\frac{***}{3}$ - $\frac{**}{4}$ - $\frac{**}{5}$

- Part No.
- Style:
(Blank):Type 1
2: Type 2
- Material:
(Blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.
6T:Nylon 6T,UL94V-0
- Color:
(Blank):Ivory
RD:Red
YL:Yellow
BL:Blue
BK:Black
GN:Green
WH:White
LE:Light Blue
OR:Orange
GY:Gray
PK:Pink
BR:Brown
VI:Violet
LY:Lemon yellow
VY:Vivid yellow
- Finish:
(Blank):Tin over Nickel
G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Material: Nylon66, UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions (mm)	
	A	B
A2508WR-F-3P-A	5.00	10.00
A2508WR-F-5P-A	10.00	15.00
A2508WR-F-7P-A	15.00	20.00
A2508WR-F-9P-A	20.00	25.00
A2508WR-F-11P-A	25.00	30.00
A2508WR-F-13P-A	30.00	35.00
A2508WR-F-15P-A	35.00	40.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	2.50mm PITCH RIGHT-ANGLE WAFER		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x,x±0.25 x,x.x±0.20 x,x.x.x±0.15 ANGLES ±1°			DRAWING NO.		REV
			A2508WR-F-XP-A		A0