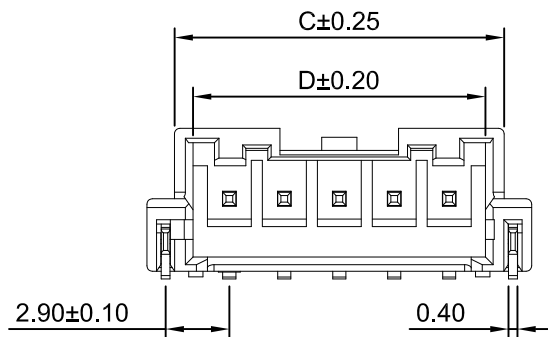
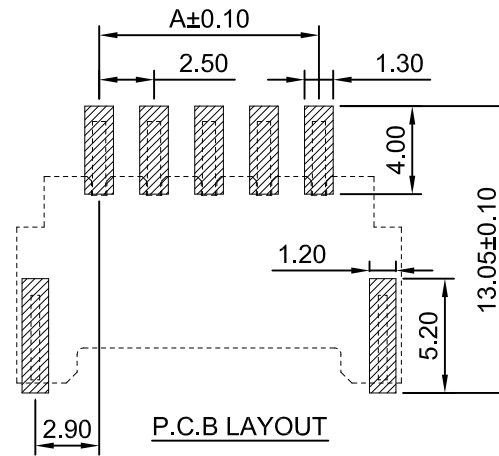
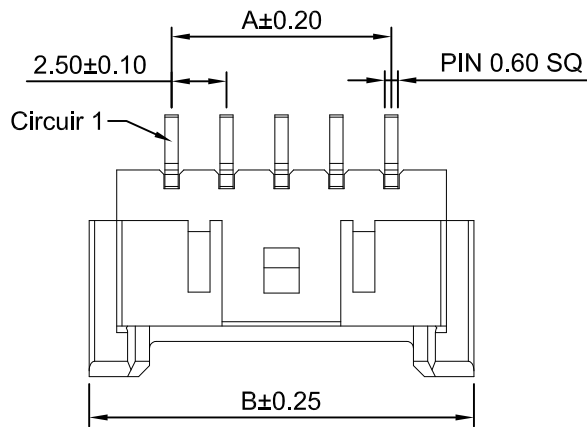


Ordering Information:
A2508WR-S-XP-F - *** - ***
1 2 3

- 1.Part NO.
2.Color:
(Blank):Ivory
BK:Black
RD:Red
BL:Blue
3.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel(Au:1u")
G3: Gold over Nickel(Au:3u")

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material:Brass/Tin over Nickel
Solder Tabs:Brass/Tin over Nickel
Material: Nylon 9T,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2508WR-S-2P-F	2.50	10.00	7.50	5.80
A2508WR-S-3P-F	5.00	12.50	10.00	8.30
A2508WR-S-4P-F	7.50	15.00	12.50	10.80
A2508WR-S-5P-F	10.00	17.50	15.00	13.30
A2508WR-S-6P-F	12.50	20.00	17.50	15.80
A2508WR-S-7P-F	15.00	22.50	20.00	18.30
A2508WR-S-8P-F	17.50	25.00	22.50	20.80
A2508WR-S-9P-F	20.00	27.50	25.00	23.30
A2508WR-S-10P-F	22.50	30.00	27.50	25.80
A2508WR-S-11P-F	25.00	32.50	30.00	28.30
A2508WR-S-12P-F	27.50	35.00	32.50	30.80
A2508WR-S-13P-F	30.00	37.50	35.00	33.30
A2508WR-S-14P-F	32.50	40.00	37.50	35.80
A2508WR-S-15P-F	35.00	42.50	40.00	38.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.50mm PITCH 90°WAFER - SMT TYPE	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508WR-S-XP-F	A0

A0	NEW RELEASE	2022.09.23
REV	DESCRIPTION	DATE