

Ordering Information:

A2508WR-XP-A - - - -
1 2 3 4

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-0(Ivory)

GWT: Nylon 66,UL94V-0,(Beige)

IEC 60335-1,5th Edition

Glow Wire Capable.

6T:Nylon 6T,UL94V-0

3.Color:

(Blank):Ivory

RD:Red

YL:Yellow

BL:Blue

BK:Black

GN:Green

WH:White

LE:Light Blue

OR:Orange

GY:Gray

PK:Pink

BR:Brown

VI:Violet


LY:Lemon yellow

VY:Vivid yellow


4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel



3P



7P~15P

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.







Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
A2508WR-3P-A	5.00	10.00	A2508WR-11P-A	25.00	30.00
A2508WR-5P-A	10.00	15.00	A2508WR-13P-A	30.00	35.00
A2508WR-7P-A	15.00	20.00	A2508WR-15P-A	35.00	40.00
A2508WR-9P-A	20.00	25.00			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.50mm PITCH RIGHT-ANGLE WAFER
mm	2:1	1 of 1	
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO. A2508WR-XP-A
x.xx±0.25			
x.xx±0.20			
x.xxx±0.15			
ANGLES ±1°			REV A0

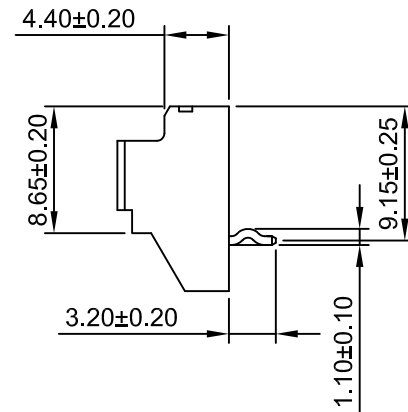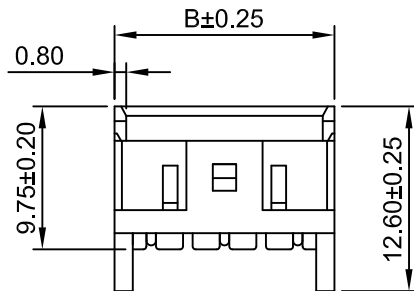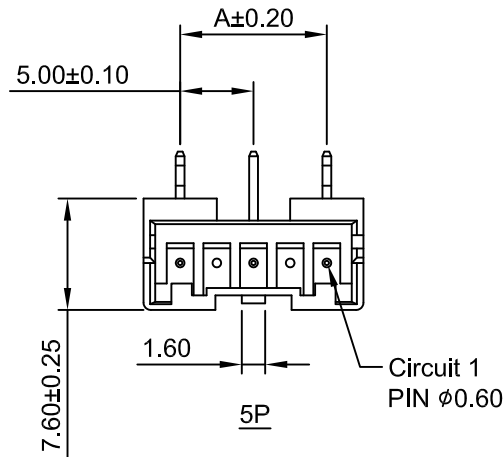

Detail C
Scale 2:1

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.07.25