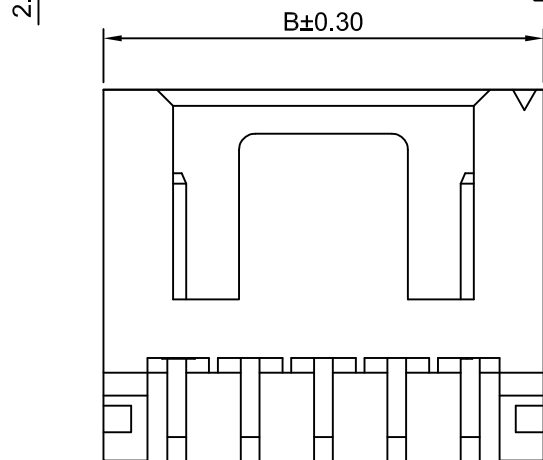
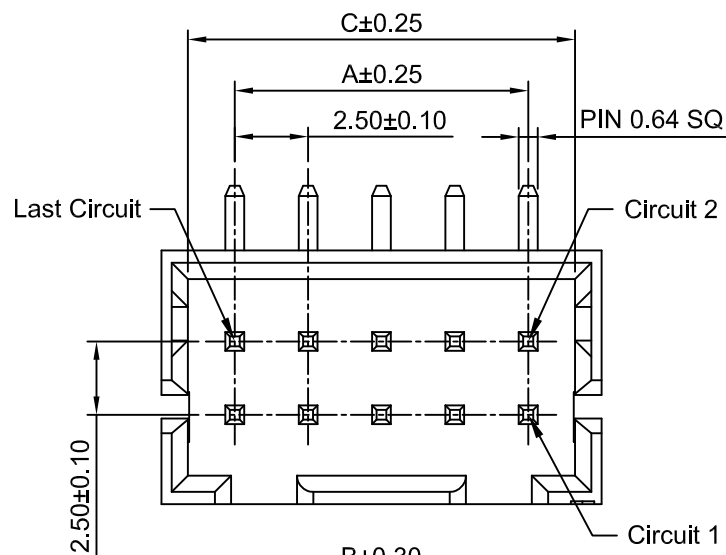


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2508WRA-2xXP-P-LCP - $\frac{**}{2}$ - D22 - $\frac{***}{3}$

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")



G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

RE: Tape & Reel

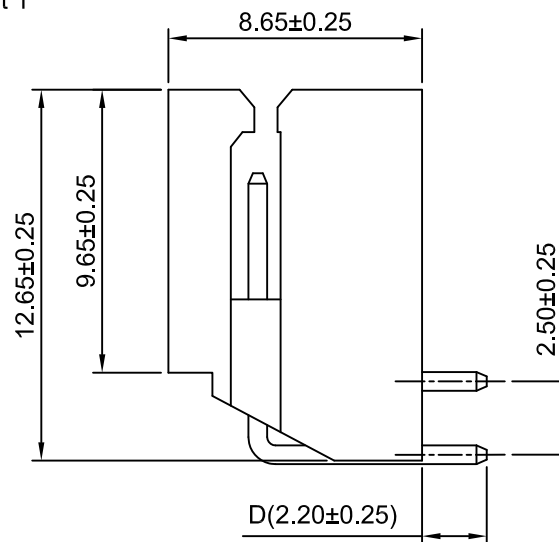

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)

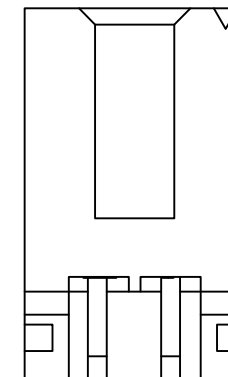

2P~3P

Ordering Information & Dimensions




Circuits	Dimensions(mm)		
	A	B	C
A2508WRA-2x2P-P-LCP	2.50	7.50	5.70
A2508WRA-2x3P-P-LCP	5.00	10.00	8.20
A2508WRA-2x4P-P-LCP	7.50	12.50	10.70
A2508WRA-2x5P-P-LCP	10.00	15.00	13.20
A2508WRA-2x6P-P-LCP	12.50	17.50	15.70
A2508WRA-2x7P-P-LCP	15.00	20.00	18.20
A2508WRA-2x8P-P-LCP	17.50	22.50	20.70
A2508WRA-2x9P-P-LCP	20.00	25.00	23.20
A2508WRA-2x10P-P-LCP	22.50	27.50	25.70
A2508WRA-2x11P-P-LCP	25.00	30.00	28.20
A2508WRA-2x12P-P-LCP	27.50	32.50	30.70

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.







Unit		Scale		Sheet		TITLE	
mm		5:1		1 of 1			
DRWN		CHK'D		APPR		2.50mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
Wenmin Luo		Diankui Wan		Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION					
x.xx±0.25				DRAWING NO. A2508WRA-2xXP-P-LCP-D22		REV A1	
x.xxx±0.20							
x.xxxx±0.15							
ANGLES ±1°							

REV	DESCRIPTION	DATE
A1	JL-GC-ECN00411	2024.11.16
A0	NEW RELEASE	2020.10.12

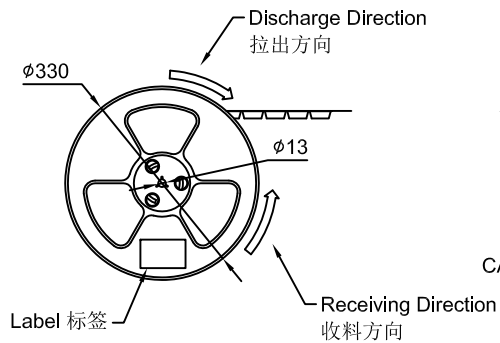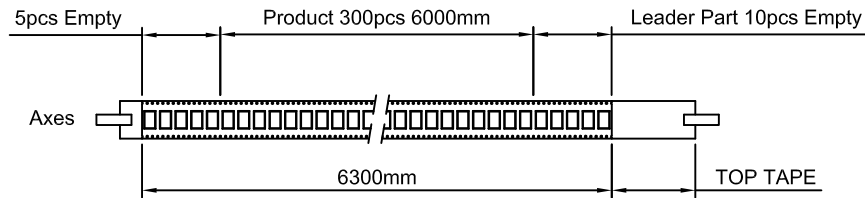

Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

COVER TAPE PEEL STRENGTH:20~120g
PEEL SPEED:300mm/minute

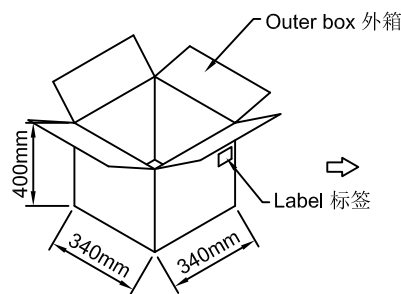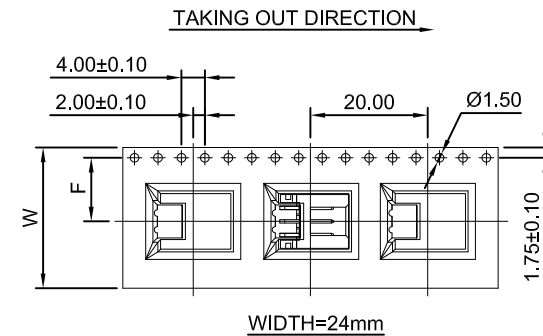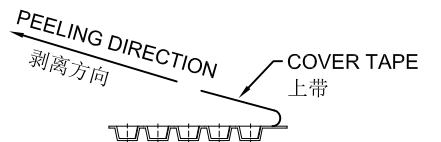

NOTES:

- 1.Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 2.10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2x3P~2x4P	24.00	/	11.50	28.50	24.50	300	13	3900

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1:1.25	1 of 1	2.50mm PITCH RIGHT-ANGLE WAFER PACKING		
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508WRA-2xXP-P-LCP-D22		A0

A0	NEW RELEASE	2024.11.16
REV	DESCRIPTION	DATE