





7P~15P

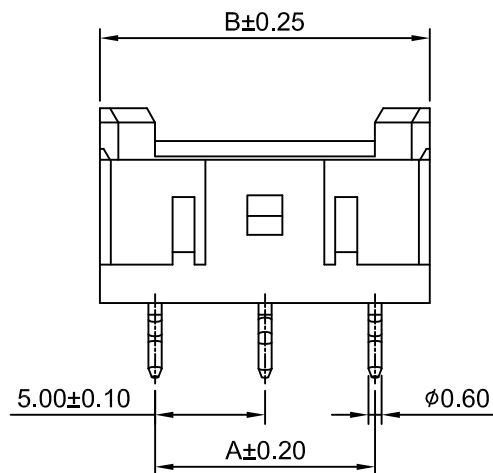


5P

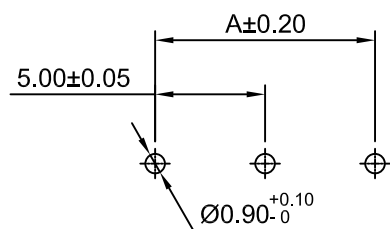

P.B.C LAYOUT

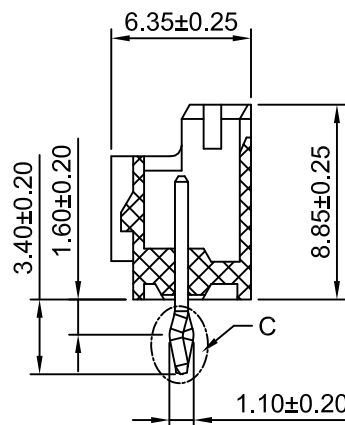

Detail:C
Scale:2:1



3P~15P

Ordering Information:

A2508WV-XP-A - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(Blank) : Nylon 66,UL94V-0

GWT : Nylon 66,UL94V-0,GWT 750°C

3.Color:

(Blank) : Ivory BK : Black

RD : Red BL : Blue

YL : Yellow GN : Green

OR : Orange BR : Brown

GY : Gray PK : Pink

WH : White LY : Lemon yellow

P : Purple LE : Light blue

FY : Vivid yellow

4.Finish:

(Blank) : Tin over Nickel

G : Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Press K	
	A	B		R	L
3P	5.00	10.00	3P	P1,P3	---
5P	10.00	15.00	5P	P1,P5	P3
7P	15.00	20.00	7P	P1,P7	P3
9P	20.00	25.00	9P	P1,P9	P5
11P	25.00	30.00	11P	P1,P11	P5
13P	30.00	35.00	13P	P1,P13	P7
15P	35.00	40.00	15P	P1,P15	P7

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.50mm Pitch 180° Wafer		
DRWN	CHK'D	APPR			
Wenmin Luo	DianKui Wan	Jack Yin	DRAWING NO. A2508WV-XP-A		
General Tolerances					REV A3
THIRD ANGLE PROJECTION					
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°					

A3	CHANGE THE DRAWING	2021.12.17
A2	CHANGE THE PRESS K	2019.07.08
A1	CHANGE THE DRAWING	2018.12.21
A0	NEW RELEASE	2012.03.29
REV	DESCRIPTION	DATE