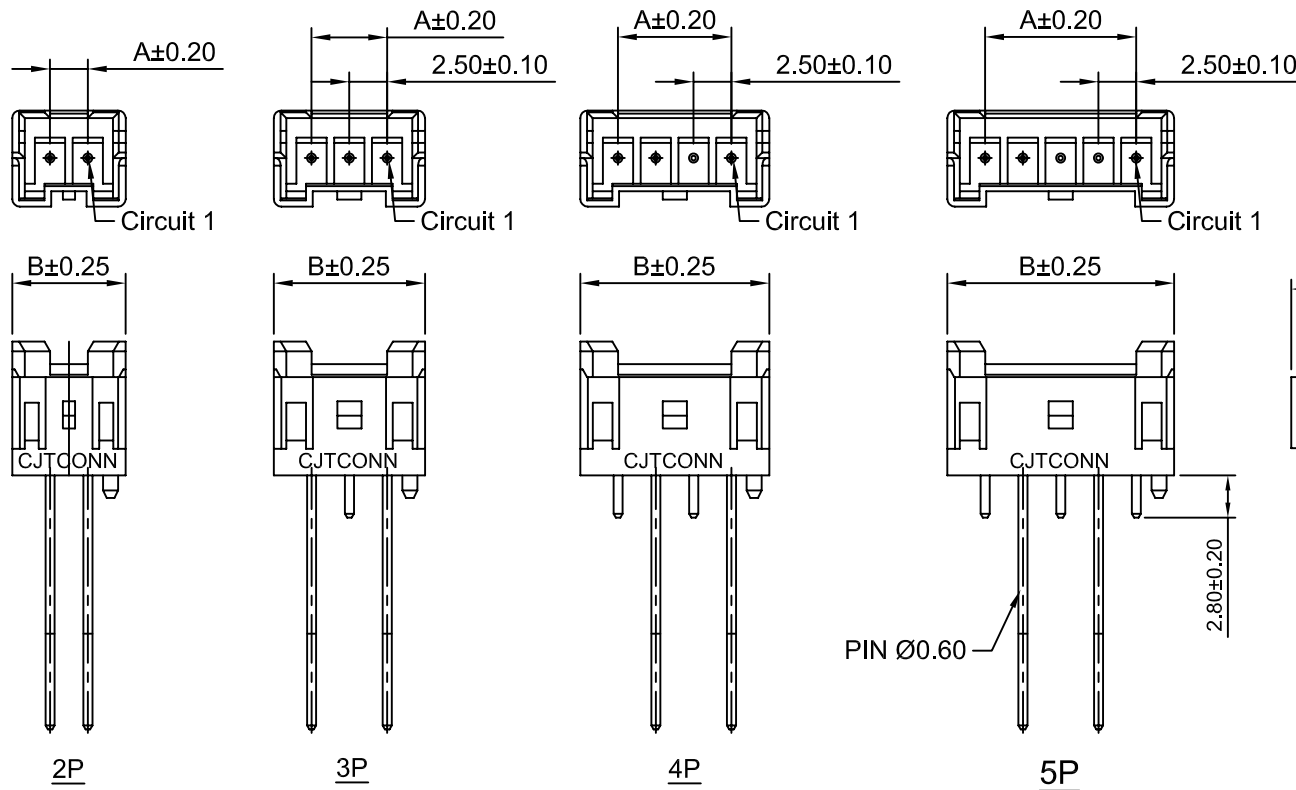


Ordering Information:
A2508WVT-F-XP - **
1 2

1.Part No.
2.Color:
(blank):Ivory
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green





SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 10m Ω Max
Insulation Resistance: 1000M Ω Min
Withstanding Voltage: 1000V AC/minute
Pin Material:Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	6P	12.50	17.50
3P	5.00	10.00	7P	15.00	20.00
4P	7.50	12.50	8P	17.50	22.50
5P	10.00	15.00			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm PITCH 180° WAFER	
mm	2:1	1/4		
Draw BY:		Approved :		
Jack Yin		GONGYB		
General Tolerance				
ANGLE±				
x.xx≤0.25 x.xx≤0.20 x.xxx≤0.15				
1	DRAW NO : A2508WVT-F-XP			REV A0

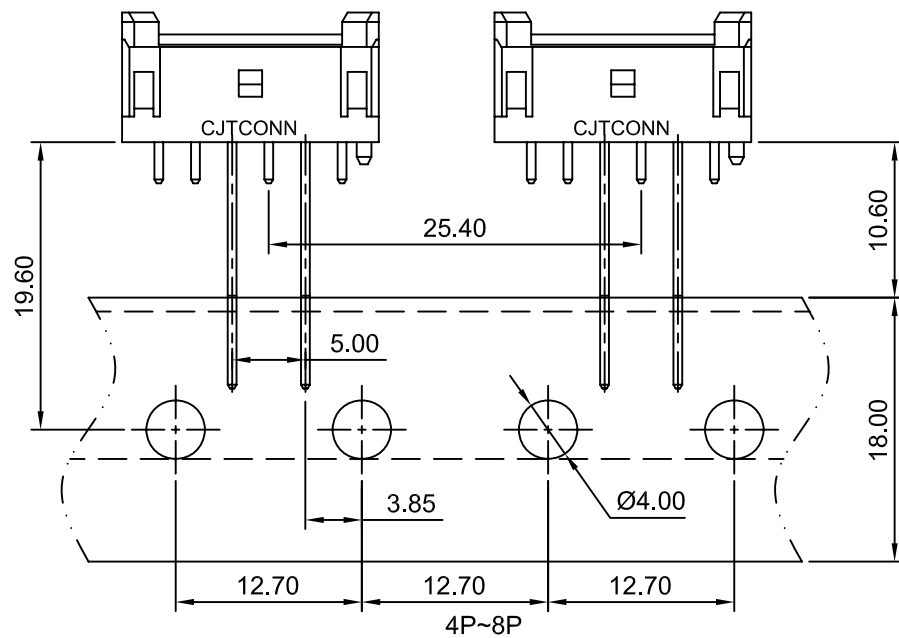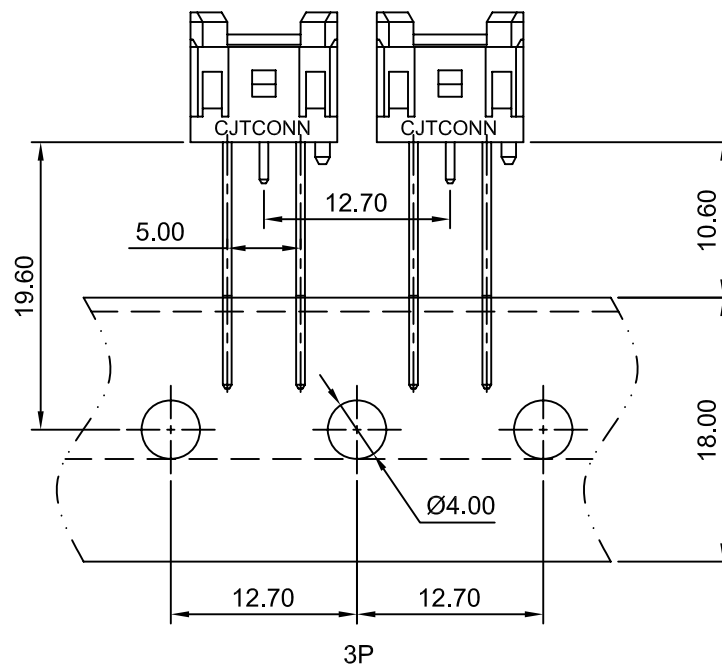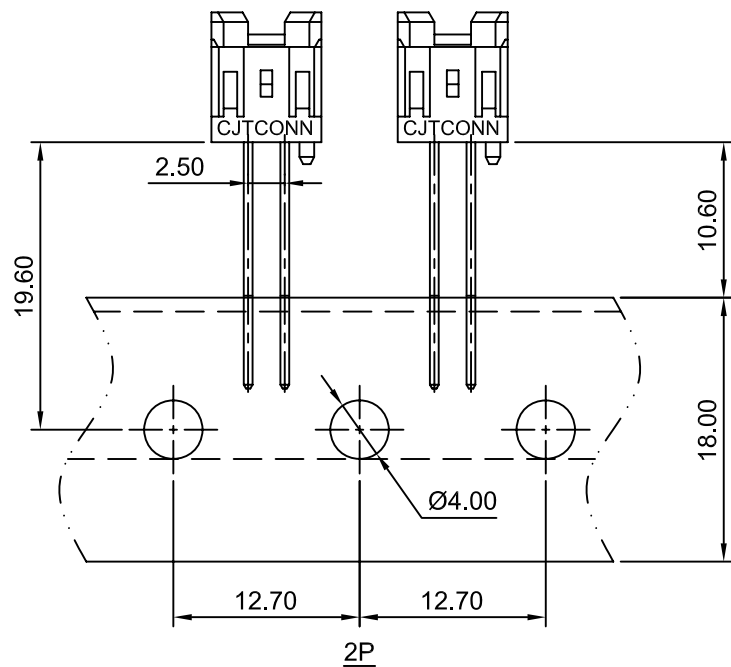

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm PITCH 180° WAFER	
mm	2:1	1/4		
Draw BY:		Approved :		
Jack Yin		GONGYB		
General Tolerance				
x.xx≤0.25 x.xx≤0.20 x.xxx≤0.15		ANGLE± 	DRAW NO : A2508WVT-F-XP	