


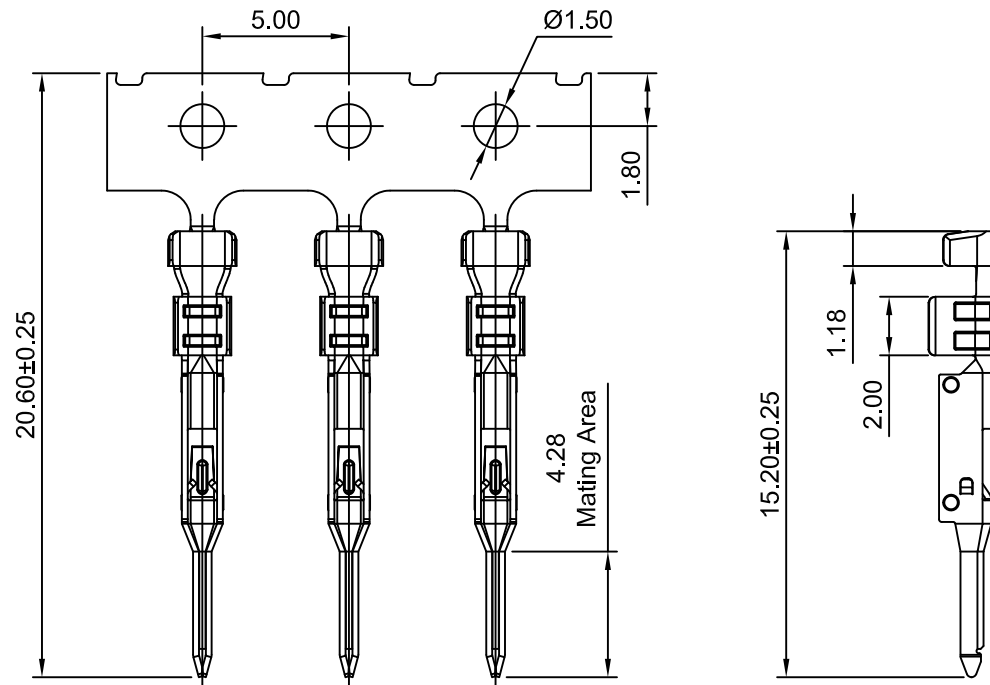

Ordering Information:
A2509M - G** - B-L - ***
 1 2 3

1.Part NO.

2.Material:

GP: Phosphor Bronze




GCA: High conductive copper alloy

3.Finish:

(Blank): Gold over Nickel(Au:1µin[0.03µm] Min,Mating Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

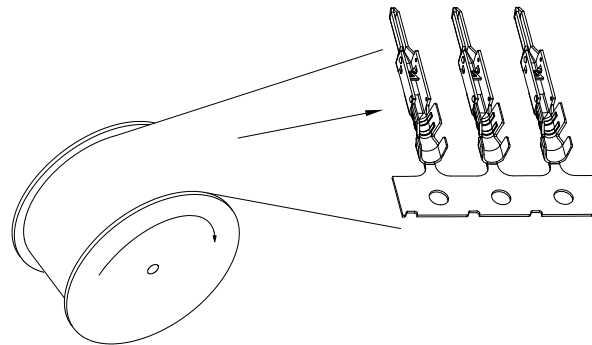

Ordering information & Specifications

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2509M-TP-B-L	AWG#24~26	1.30mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
A2509M-GP-B-L	AWG#24~26	1.30mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS
A2509M-TCA-B-L	AWG#24~26	1.30mm(max)	High Conductivity Copper Alloy	Matte Tin over Nickel	10,000 PCS
A2509M-GCA-B-L	AWG#24~26	1.30mm(max)	High Conductivity Copper Alloy	Gold over Nickel	10,000 PCS

Unit:mm

Unwinding Direction

A0	NEW RELEASE	2024.11.22
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit mm	Scale 4:1	Sheet 1 of 1	2.50mm PITCH CRIMP TERMINAL	
DRAWN Haisen Li	CHK'D Diankui Wan	APPR'D Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		DRAWING NO. A2509M-T-B-L		REV A0