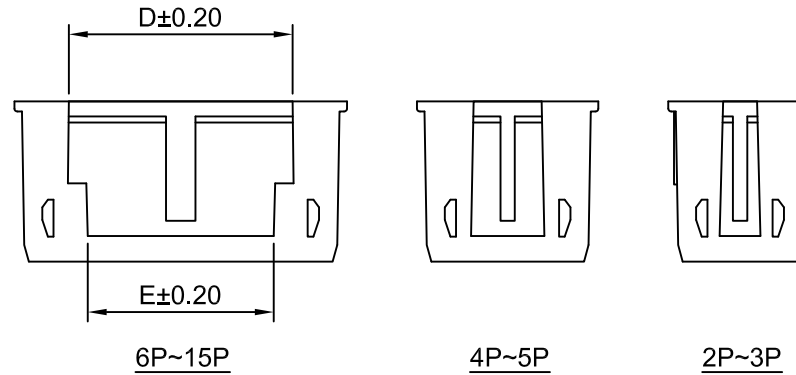


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				
	A	B	C	D	E
2P	2.50	5.70	7.00	2.25	2.70
3P	5.00	8.20	9.50	2.25	2.70
4P	7.50	10.70	12.00	4.50	4.85
5P	10.00	13.20	14.50	4.50	4.85
6P	12.50	15.70	17.00	9.80	7.30
7P	15.00	18.20	19.50	12.30	9.80
8P	17.50	20.70	22.00	14.80	12.30
9P	20.00	23.20	24.50	14.80	12.30
10P	22.50	25.70	27.00	17.35	14.80
11P	25.00	28.20	29.50	17.35	14.80
12P	27.50	30.70	32.00	17.35	14.80
13P	30.00	33.20	34.50	17.35	14.80
14P	32.50	35.70	37.00	17.35	14.80
15P	35.00	38.20	39.50	17.35	14.80

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm Pitch Housing	
mm	3:1	1 of 1		
Draw By:		Approved :		
Diankui Wan		Jack Yin		
General Tolerance				
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 	DRAW NO : A2512HF-XP	
			REV A1	

