


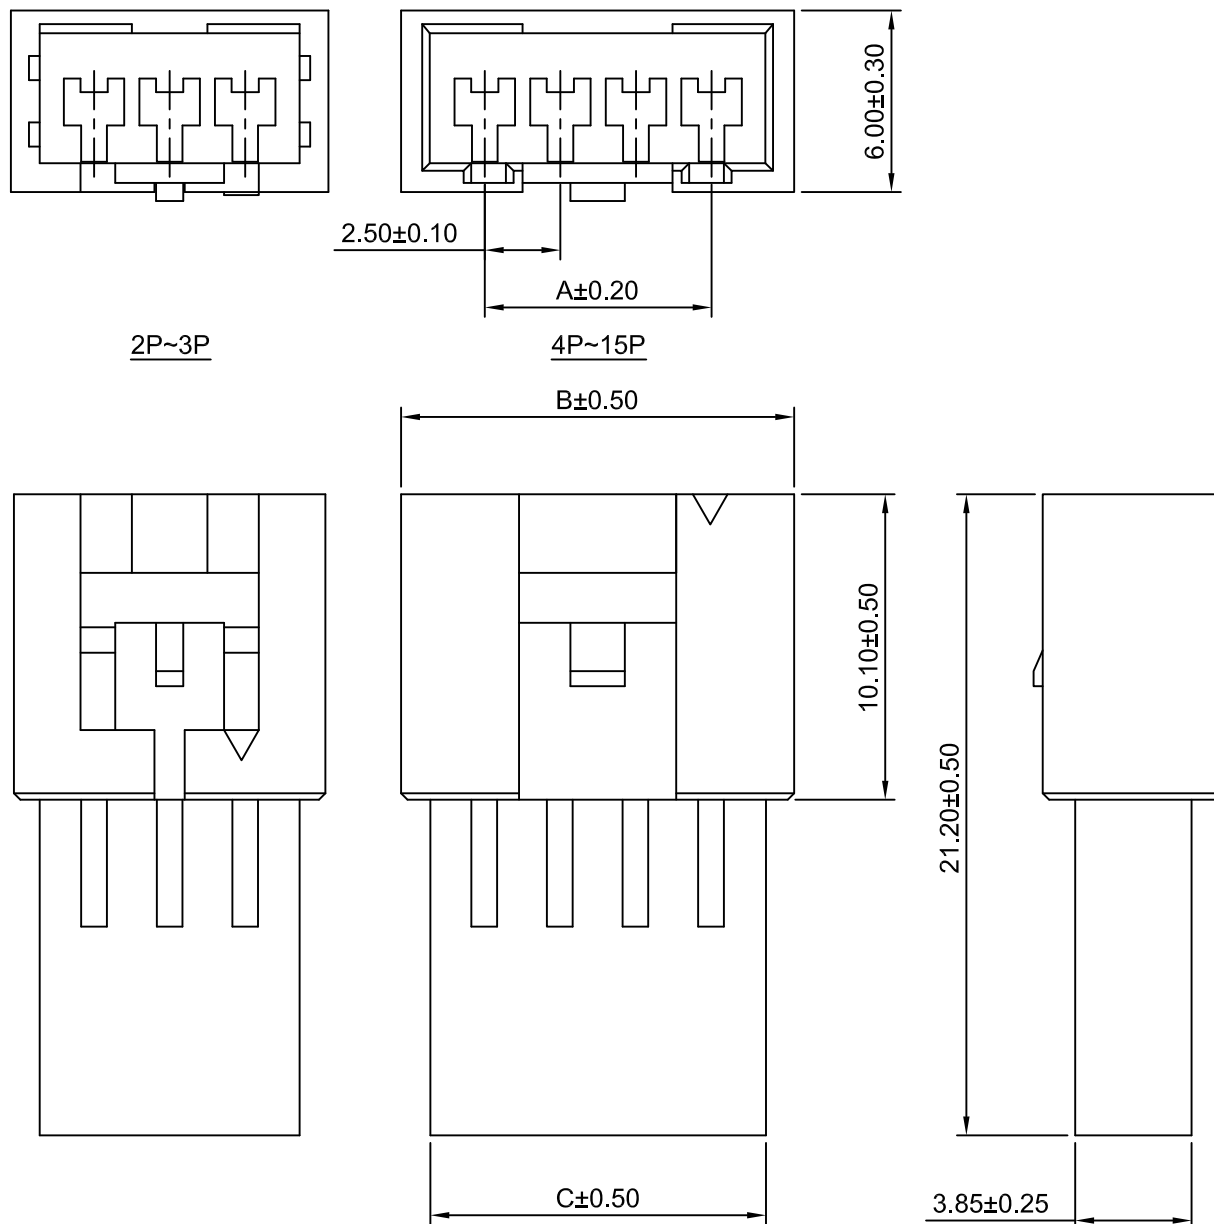

Ordering Information:


A2512HM-XP - ***
1 2

1.Part No.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,GWT 750°C



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A2512HM-2P	2.50	8.00	5.90
A2512HM-3P	5.00	10.50	8.40
A2512HM-4P	7.50	13.00	10.90
A2512HM-5P	10.00	15.50	13.40
A2512HM-6P	12.50	18.00	15.90
A2512HM-7P	15.00	20.50	18.40
A2512HM-8P	17.50	23.00	20.90
A2512HM-9P	20.00	25.50	23.40
A2512HM-10P	22.50	28.00	25.90
A2512HM-11P	25.00	30.50	28.40
A2512HM-12P	27.50	33.00	30.90
A2512HM-13P	30.00	35.50	33.40
A2512HM-14P	32.50	38.00	35.90
A2512HM-15P	35.00	40.50	38.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			Title : 2.50mm PITCH					
mm			4:1			1 of 1								
Draw By:			Approved :			Housing								
Diankui Wan			Jack Yin											
General Tolerance														
x.xx±0.25			PROJECT											
x.xxx±0.20														
x.xxxx±0.15														
1			DRAW NO : A2512HM-XP						REV A0					