
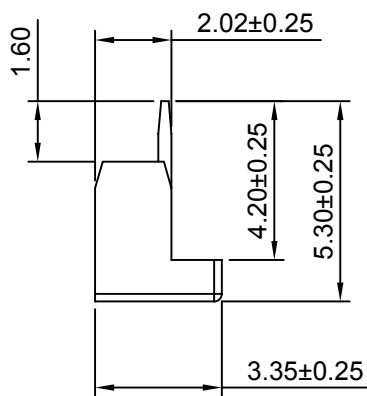
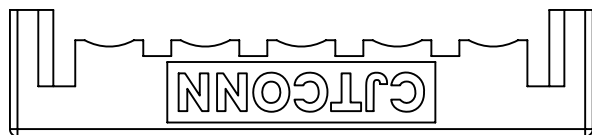
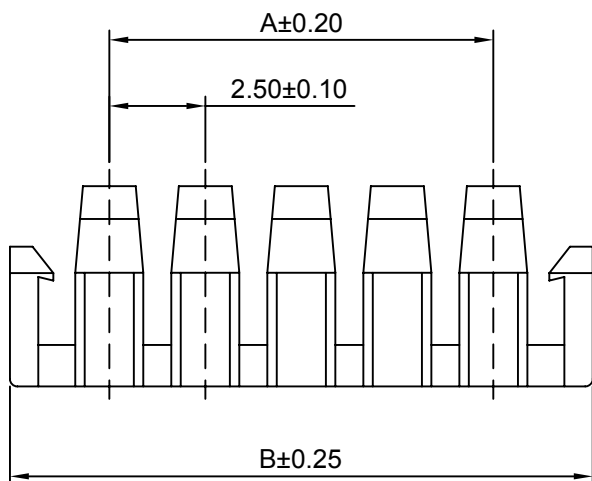


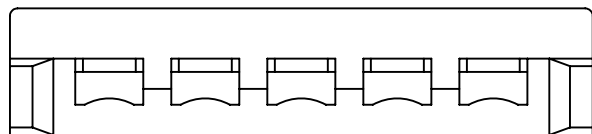

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon66 UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	8.00	9P	20.00	25.50
3P	5.00	10.50	10P	22.50	28.00
4P	7.50	13.00	11P	25.00	30.50
5P	10.00	15.50	12P	27.50	33.00
6P	12.50	18.00	13P	30.00	35.50
7P	15.00	20.50	14P	32.50	38.00
8P	17.50	23.00	15P	35.00	40.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title : 2.50mm PITCH	
mm	5:1	1 of 1		
Draw BY:		Approved :	Seal	
Jack Yin		GONGYB		
General Tolerance				
x.xx≤0.25 x.xx≤0.20 x.xxx≤0.15		ANGLE± 		
			DRAW NO : A2512SA-XP	REV A0

			x.x≤0.25	ANGLE±
			x.xx≤0.20	⊕
			x.xxx≤0.15	⊕