

Ordering Information:



A2512SB-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): White

RD: Red

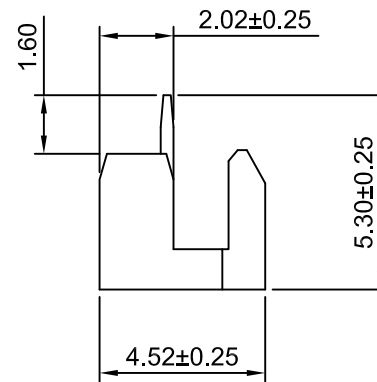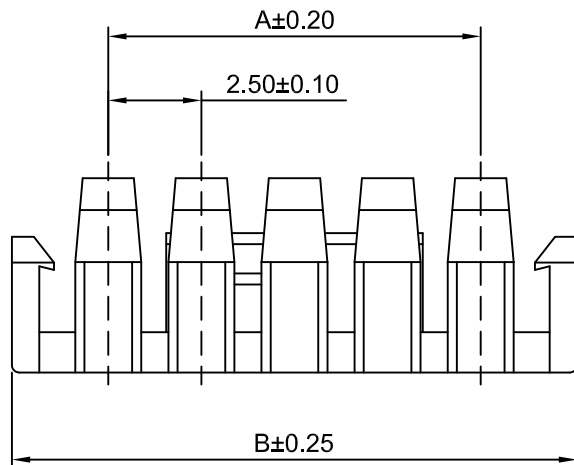

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.


Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon66 UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	5.00	10.50	10P	22.50	28.00
4P	7.50	13.00	11P	25.00	30.50
5P	10.00	15.50	12P	27.50	33.00
6P	12.50	18.00	13P	30.00	35.50
7P	15.00	20.50	14P	32.50	38.00
8P	17.50	23.00	15P	35.00	40.50
9P	20.00	25.50			

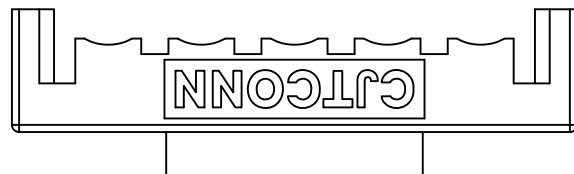

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	2.50mm PITCH	
DRAWN	CHK'D	APPR	SeaL	
Haisen Li	Djankui Wan	Jack Yin	DRAWING NO. A2512SB-XP	
General Tolerances			THIRD ANGLE PROJECTION	REV A1
x.xx±0.25				
x.xxx±0.20				
x.xxxx±0.15				
ANGLES ±1°				

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2021.09.30
A0	NEW RELEASE	2016.09.20