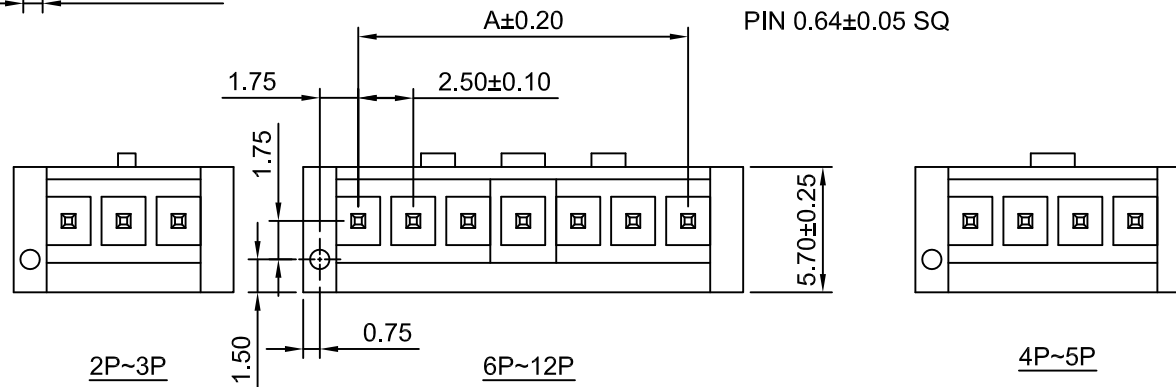
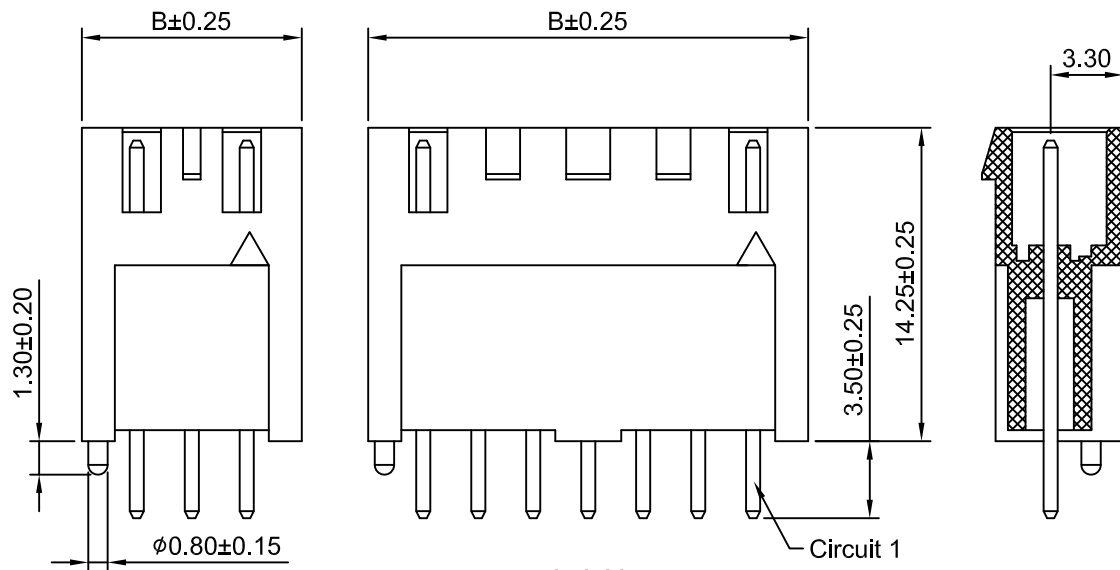


P.C.B LAYOUT

Ordering Information:

A2512WV-F-XP-H - *** - **
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(Blank):White

BL:Blue

BR:Brown

BK:Black

RD:Red

YL:Yellow

GN:Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance:500MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66 , UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	8P	17.50	22.50
3P	5.00	10.00	9P	20.00	25.00
4P	7.50	12.50	10P	22.50	27.50
5P	10.00	15.00	11P	25.00	30.00
6P	12.50	17.50	12P	27.50	32.50
7P	15.00	20.00			

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit		Scale	Sheet	TITLE	
mm		3:1	1 of 1	2.50mm Pitch	
DRAWN	CHK'D	APPR	Vertical Wafer		
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x,x±0.25				A2512WV-F-XP-H	
x,x±0.20					
x,xxx±0.15					
ANGLES ±1°				REV A3	

A3	CHANGE THE DRAWING	2023.06.26
A2	ADD THE DRAWING OF OTHER PIN	2019.07.08
A1	ADD THE COLOR	2018.11.08
A0	NEW RELEASE	2016.07.01
REV	DESCRIPTION	DATE