

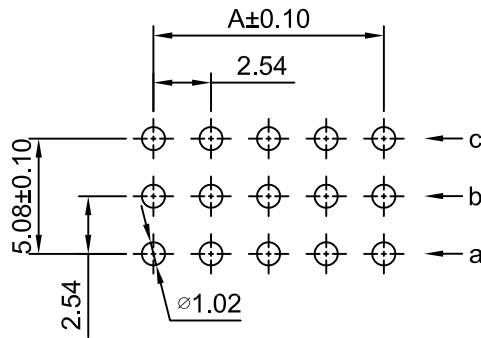



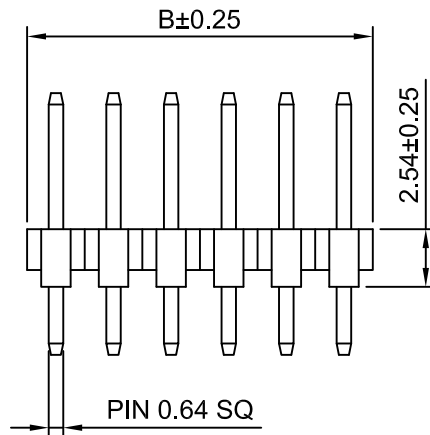

P.C.B LAYOUT
TOLERANCE:±0.05

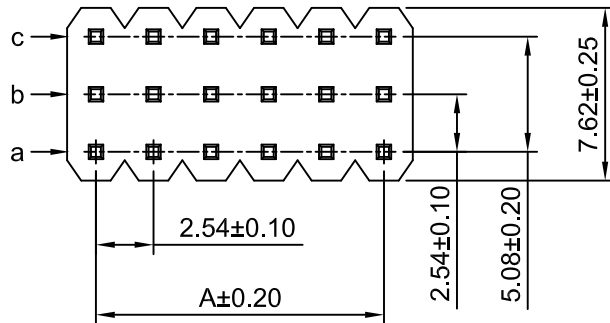

Ordering Information:

A2541WV-3xXP - * - *** - ***
1 2 3 4

1.Part No.

2.Style:

(blank): Rows a+b+c

2: Rows b

3: Rows a/c

4: Rows a+b/b+c

5: Rows a+c

3.Material:

(blank): PBT,UL94V-0

6T: Nylon 6T,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

4.Finish:

(blank): Gold over Nickel

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:Brass/Gold over Nickel

Material:PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
3x2P	2.54	5.08	3x15P	35.56	38.10	3x28P	68.58	71.12
3x3P	5.08	7.62	3x16P	38.10	40.64	3x29P	71.12	73.66
3x4P	7.62	10.16	3x17P	40.64	43.18	3x30P	73.66	76.20
3x5P	10.16	12.70	3x18P	43.18	45.72	3x31P	76.20	78.74
3x6P	12.70	15.24	3x19P	45.72	48.26	3x32P	78.74	81.28
3x7P	15.24	17.78	3x20P	48.26	50.80	3x33P	81.28	83.82
3x8P	17.78	20.32	3x21P	50.80	53.34	3x34P	83.82	86.36
3x9P	20.32	22.86	3x22P	53.34	55.88	3x35P	86.36	88.90
3x10P	22.86	25.40	3x23P	55.88	58.42	3x36P	88.90	91.44
3x11P	25.40	27.94	3x24P	58.42	60.96	3x37P	91.44	93.98
3x12P	27.94	30.48	3x25P	60.96	63.50	3x38P	93.98	96.52
3x13P	30.48	33.02	3x26P	63.50	66.04	3x39P	96.52	99.06
3x14P	33.02	35.56	3x27P	66.04	68.58	3x40P	99.06	101.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.54mm PITCH 180° TRIPLE ROW PIN HEADER			
mm		3:1		1 of 1					
Draw By:		Approved :							
Diankui Wan		Jack Yin		General Tolerance PROJECT 					
General Tolerance		PROJECT							
x.x±0.25 x.xx±0.20 x.xxx±0.15									
DRAW NO :		A2541WV-3xXP				REV A2			