
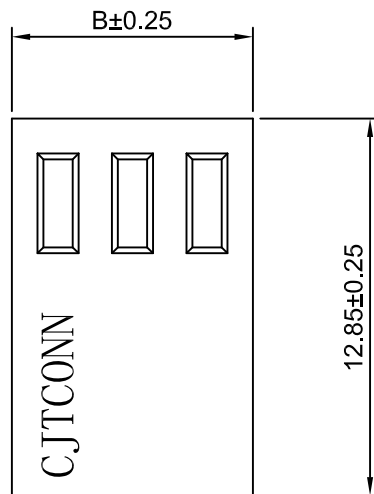


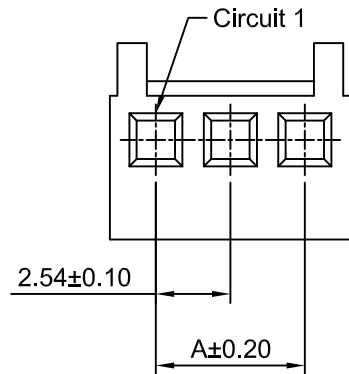

Ordering Information:


A2543HA-XP - **
1 2

1.Part No.


2.Color:

(Blank):Brown

WH:White

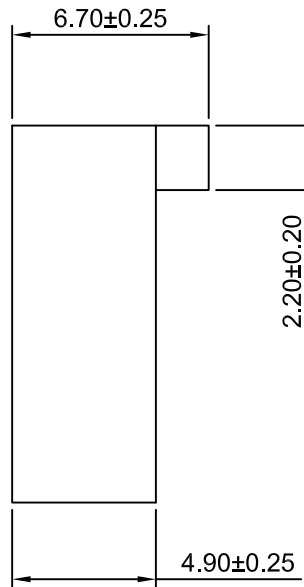

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2021.12.22
A0	NEW RELEASE	2020.05.16

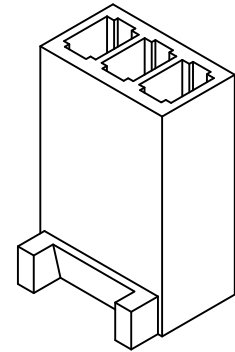

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(Brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.68	12P	27.94	31.08
3P	5.08	8.22	13P	30.48	33.62
4P	7.62	10.76	14P	33.02	36.16
5P	10.16	13.30	15P	35.56	38.70
6P	12.70	15.84	16P	38.10	41.24
7P	15.24	18.38	17P	40.64	43.78
8P	17.78	20.92	18P	43.18	46.32
9P	20.32	23.46	19P	45.72	48.86
10P	22.86	26.00	20P	48.26	51.40
11P	25.40	28.54			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.54mm PITCH	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			Housing	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION	
			DRAWING NO.	REV
			A2543HA-XP	A1