
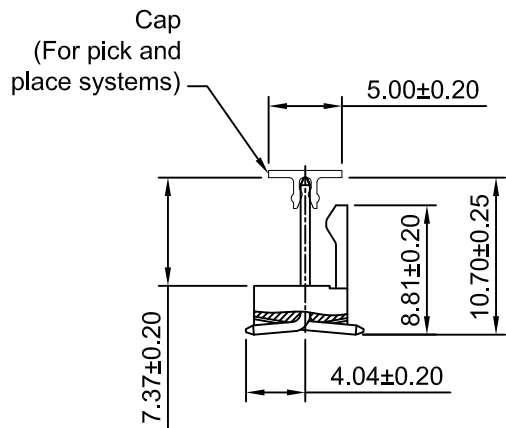

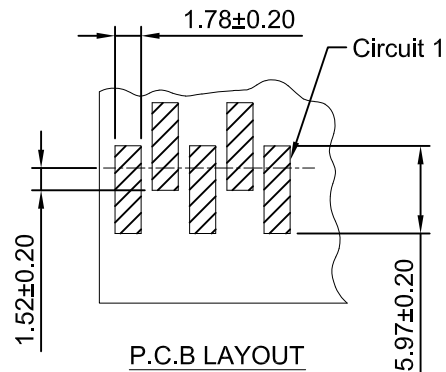
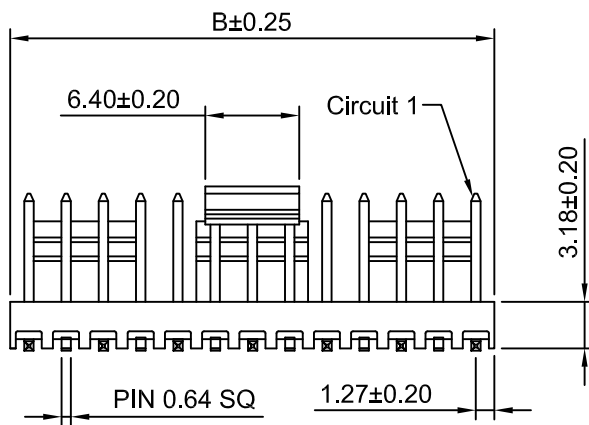


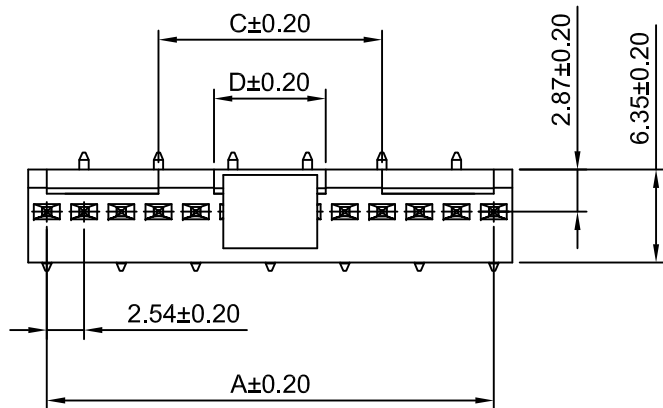

Odering Information:

A2543WVB-S-XP - ** - *

1.Part NO.

2.Color:

(Blank): Ivory

BK: Black

3.Finish

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1μin[0.03μm] Min)

G10: Gold over Nickel(Au:10μin[0.25μm] Min,Mating Area)

G15: Gold over Nickel(Au:15μin[0.38μm] Min,Mating Area)

G30: Gold over Nickel(Au:30μin[0.76μm] Min,Mating Area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2P	2.54	5.08	----	----	11P	25.40	27.94	10.16	----
3P	5.08	7.62	----	----	12P	27.94	30.48	12.70	7.62
4P	7.62	10.16	----	----	13P	30.48	33.02	15.24	7.62
5P	10.16	12.70	----	----	14P	33.02	35.56	17.78	12.70
6P	12.70	15.24	----	----	15P	35.56	38.10	20.32	12.70
7P	15.24	17.78	----	----	16P	38.10	40.64	22.86	12.70
8P	17.78	20.32	2.54	----	17P	40.64	43.18	25.40	12.70
9P	20.32	22.86	5.08	----	18P	43.18	45.72	27.94	12.70
10P	22.86	25.40	7.62	----					

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.54mm PITCH VERTICAL WAFER-SMD TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	
Chengbiao Ye	Djankui Wan	Jack Yin	A2543WVB-S-XP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	

A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE