
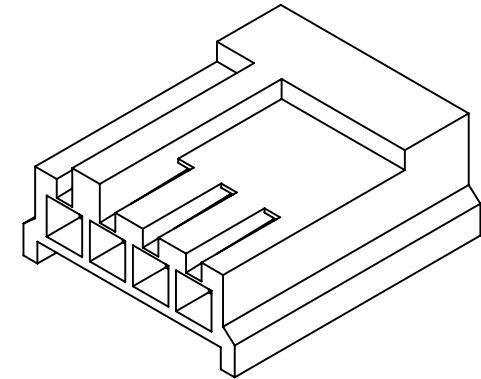
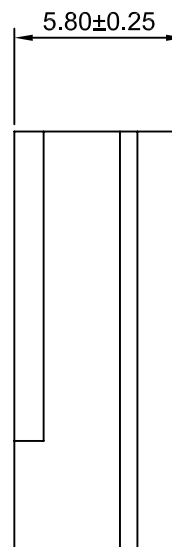
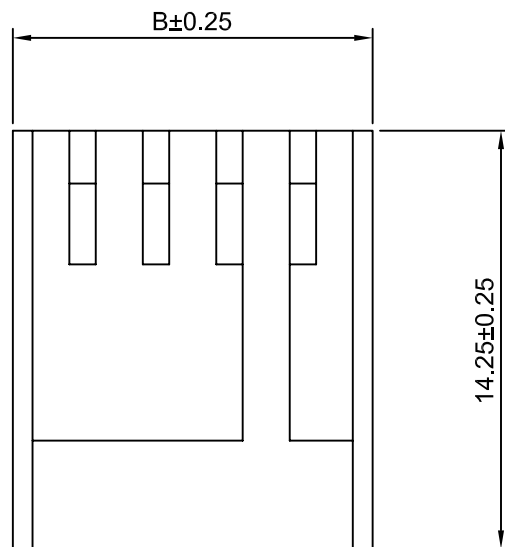


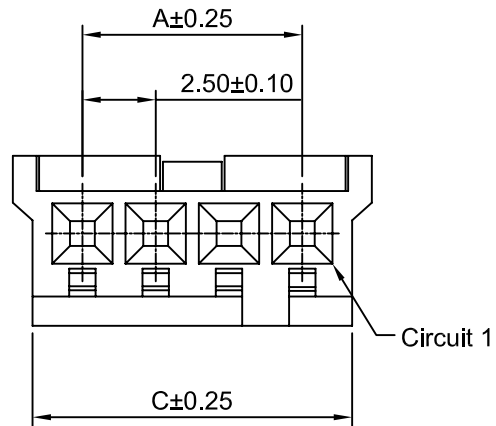

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.25	5.90	8P	17.50	22.25	20.90
3P	5.00	9.75	8.40	9P	20.00	24.75	23.40
4P	7.50	12.25	10.90	10P	22.50	27.25	25.90
5P	10.00	14.75	13.40	11P	25.00	29.75	28.40
6P	12.50	17.25	15.90	12P	27.50	32.25	30.90
7P	15.00	19.75	18.40				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
Jack Yin	GONGYB

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :		2.50mm PITCH	
		Housing	
DRAW NO :		A2544H-XP	REV A0

A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE