
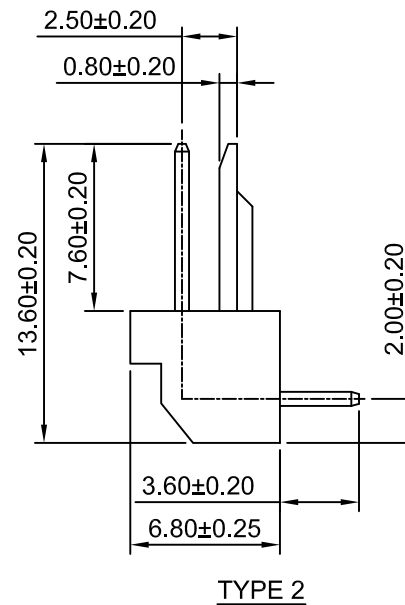
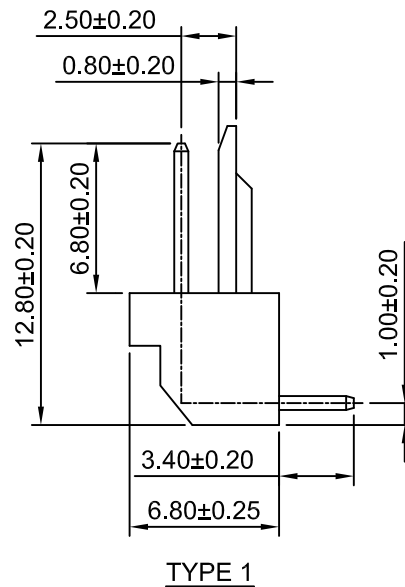
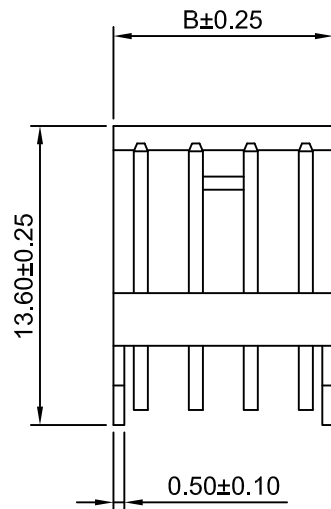
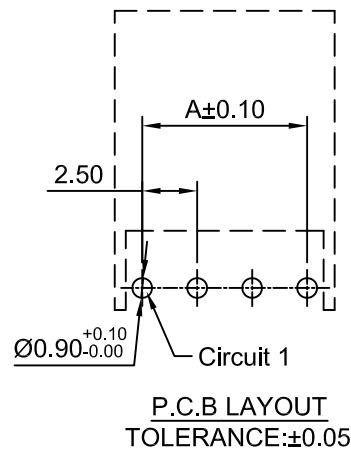


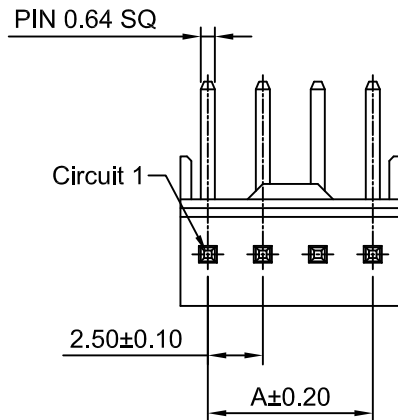

Ordering Information:

A2544WR-XP - *** - ***
1 2 3

1.Part NO.

2.Style:

(Blank): TYPE 1

2: TYPE 2

3.Color:

(Blank): White

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
A2544WR-2P	2.50	5.00
A2544WR-3P	5.00	7.50
A2544WR-4P	7.50	10.00
A2544WR-5P	10.00	12.50
A2544WR-6P	12.50	15.00
A2544WR-7P	15.00	17.50
A2544WR-8P	17.50	20.00
A2544WR-9P	20.00	22.50
A2544WR-10P	22.50	25.00
A2544WR-11P	25.00	27.50
A2544WR-12P	27.50	30.00
A2544WR-13P	30.00	32.50
A2544WR-14P	32.50	35.00
A2544WR-15P	35.00	37.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
DRN	CHK	APVD
Haisen Li	DianKui Wan	Jack Yin

General Tolerance
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION

TITLE	
2.50mm PITCH 90° SINGLE ROW WAFER	
DRAWING NO	REV
A2544WR-XP	A1

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2021.09.15
A0	NEW RELEASE	2005.12.23