

Ordering Information:

A2547HJ-XP - ***
1 2

1.Part No.

2.Material:

(blank) - PBT,UL94V-0(Black)

GWT-NAT - PBT,UL94V-0,GWT 750°C(Natural)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC


Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: PBT,UL94V-0(Black)



Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	6.14	18P	43.18	46.78
3P	5.08	8.68	19P	45.72	49.32
4P	7.62	11.22	20P	48.26	51.86
5P	10.16	13.76	21P	50.80	54.40
6P	12.70	16.30	22P	53.34	56.94
7P	15.24	18.84	23P	55.88	59.48
8P	17.78	21.38	24P	58.42	62.02
9P	20.32	23.92	25P	60.96	64.56
10P	22.86	26.46	26P	63.50	67.10
11P	25.40	29.00	27P	66.04	69.64
12P	27.94	31.54	28P	68.58	72.18
13P	30.48	34.08	29P	71.12	74.72
14P	33.02	36.62	30P	73.66	77.26
15P	35.56	39.16	31P	76.20	79.80
16P	38.10	41.70	32P	78.74	82.34
17P	40.64	44.24			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin


General Tolerance

A1	CHANGE THE INFORMATION	2020.02.25	x.x±0.25	PROJECT
A0	NEW RELEASE	2005.07.01	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :		2.54mm PITCH	
		Housing	
DRAW NO :	A2547HJ-XP		REV A1

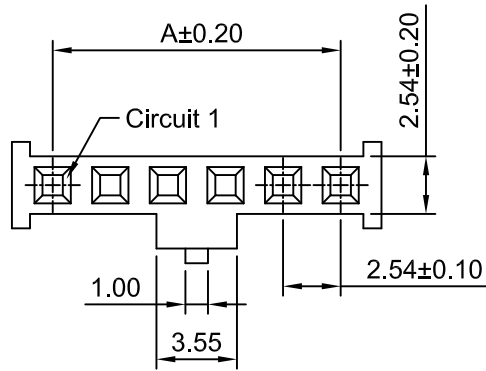

4P~32P



2P~3P

