
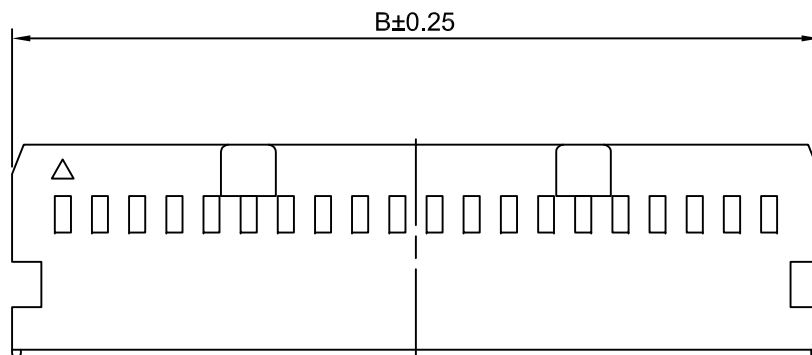


SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2547HSA-2x5P	10.16	17.10
A2547HSA-2x7P	15.24	22.18
A2547HSA-2x8P	17.78	24.72
A2547HSA-2x10P	22.86	29.80
A2547HSA-2x12P	27.94	34.88
A2547HSA-2x13P	30.48	37.42
A2547HSA-2x15P	35.56	42.50
A2547HSA-2x17P	40.64	47.58
A2547HSA-2x20P	48.26	55.20
A2547HSA-2x22P	53.34	60.28
A2547HSA-2x25P	60.96	67.90

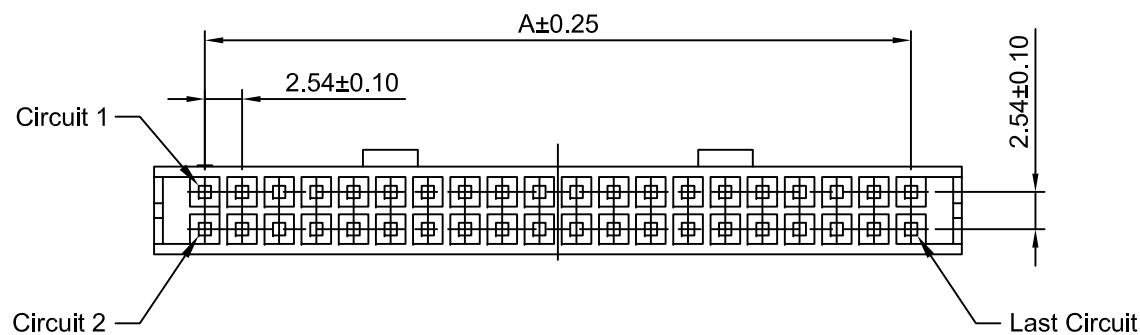

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.54mm PITCH DUAL ROW HOUSING		
DRWN	CHK'D	APPR			
Wenmin Luo	DianKui Wan	Jack Yin			
General Tolerances					
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		THIRD ANGLE PROJECTION	DRAWING NO.		REV A1
			A2547HSA-2xXP		

A1	CHANGE THE DRAWING	2021.10.20
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE