
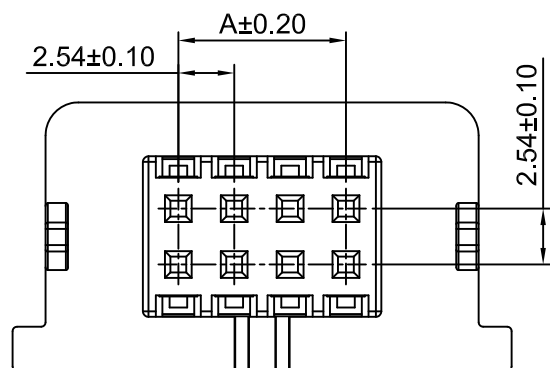
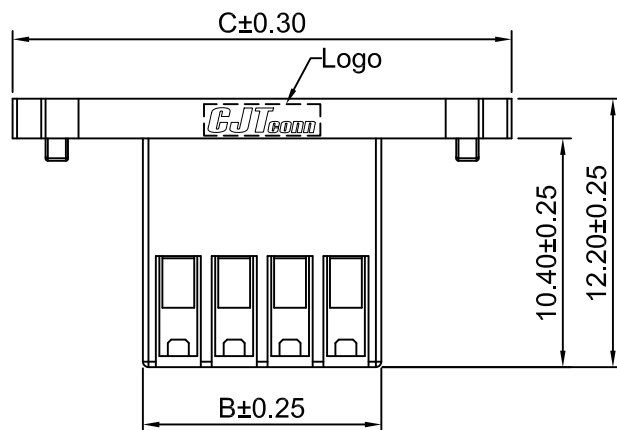


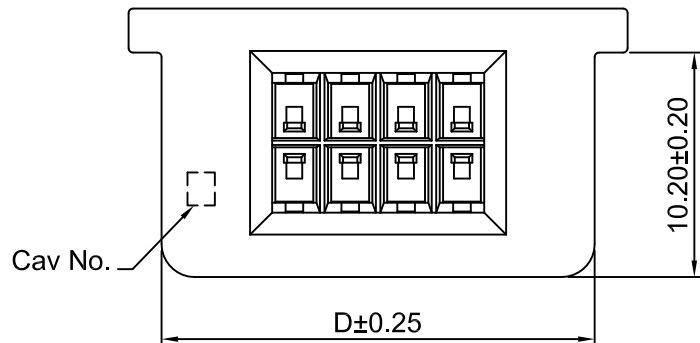

Ordering Information:

A2547HV-2xXP - ***


1 2

1.Part NO.

2.Color:

(Blank): Gray

BK: Black

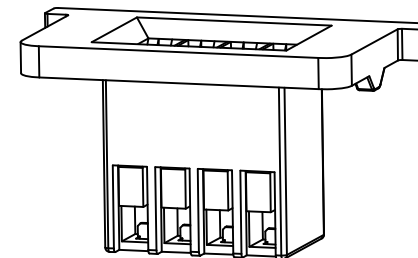

SPECIFICATIONS:

Current Rating: 8A AC,DC(MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2547HV-2x2P	2.54	5.76	17.61	14.61
A2547HV-2x3P	5.08	8.30	20.15	17.15
A2547HV-2x4P	7.62	10.84	22.69	19.69
A2547HV-2x5P	10.16	13.38	25.23	22.23
A2547HV-2x6P	12.70	15.92	27.77	24.77
A2547HV-2x7P	15.24	18.46	30.31	27.31
A2547HV-2x8P	17.78	21.00	32.85	29.85
A2547HV-2x9P	20.32	23.54	35.39	32.39
A2547HV-2x10P	22.86	26.08	37.93	34.93

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR'D	2.54mm PITCH HOUSING	
Jianying Zhu	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547HV-2xXP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2024.01.05
REV	DESCRIPTION	DATE