


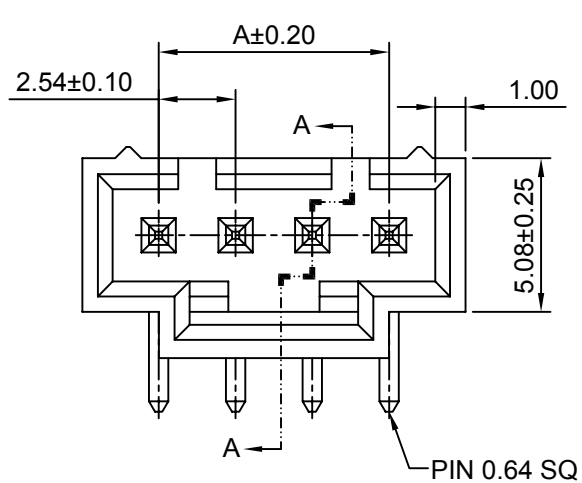


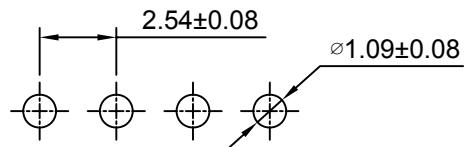

4P-25P

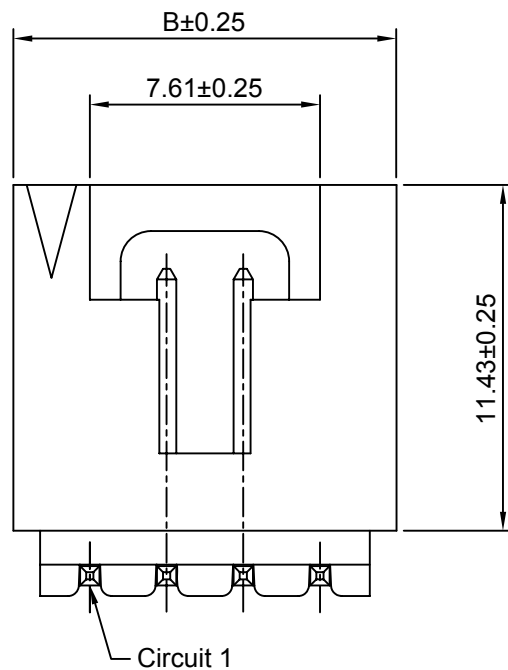


P.C.B LAYOUT

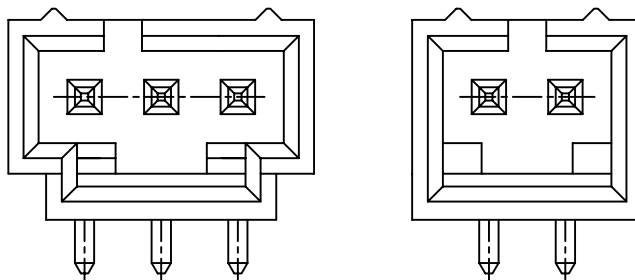

3P

2P

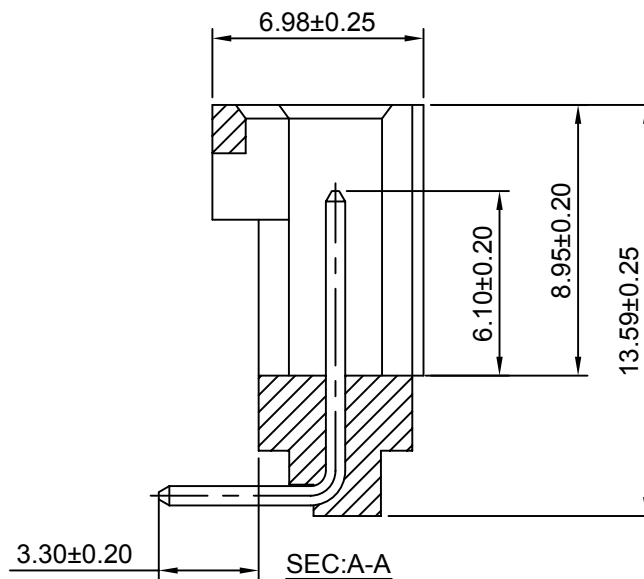

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT 15%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	7.59	9P	20.32	25.37
3P	5.08	10.13	10P	22.86	27.91
4P	7.62	12.67	11P	25.40	30.45
5P	10.16	15.21	12P	27.94	32.99
6P	12.70	17.75	13P	30.48	35.53
7P	15.24	20.29	14P	33.02	38.07
8P	17.78	22.83	15P	35.56	40.61

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY: Tony Su
Approved: Jack Yin

Title: 2.54mm PITCH

90° WAFER

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO: A2547WR-XP-2 REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.07.01