


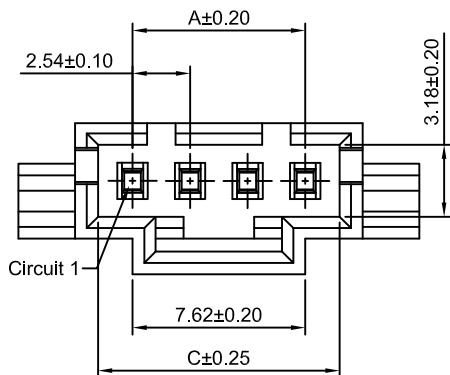





4P~25P

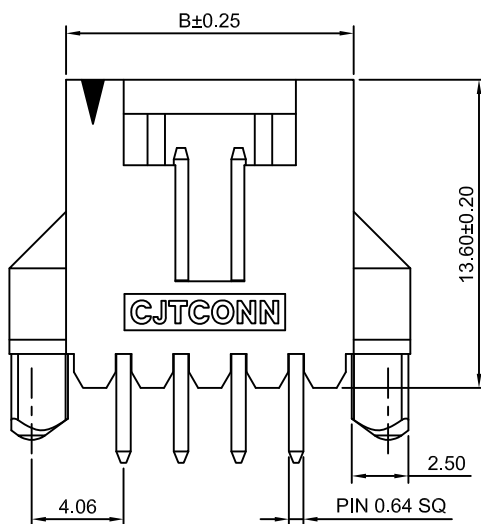



2P



3P

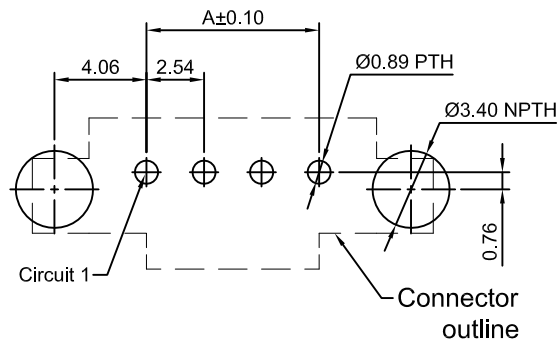

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

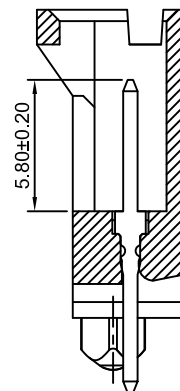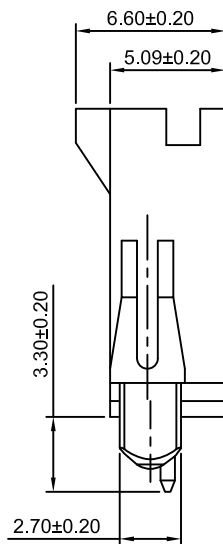

Odering Information:
A2547WVA-F-XP - *** - ***
1 2 3

- 1.Part NO.
- 2.Material:
(Blank): PBT,UL94V-0(Black)
LCP:LCP,UL94V-0(Black)
- 3.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WVA-F-2P	2.54	7.62	5.59
A2547WVA-F-3P	5.08	10.16	8.13
A2547WVA-F-4P	7.62	12.70	10.67
A2547WVA-F-5P	10.16	15.24	13.21
A2547WVA-F-6P	12.70	17.78	15.75
A2547WVA-F-7P	15.24	20.32	18.29
A2547WVA-F-8P	17.78	22.86	20.83
A2547WVA-F-9P	20.32	25.40	23.37
A2547WVA-F-10P	22.86	27.94	25.91
A2547WVA-F-11P	25.40	30.48	28.45
A2547WVA-F-12P	27.94	33.02	30.99
A2547WVA-F-13P	30.48	35.56	33.53
A2547WVA-F-14P	33.02	38.10	36.07
A2547WVA-F-15P	35.56	40.64	38.61
A2547WVA-F-16P	38.10	43.18	41.15
A2547WVA-F-17P	40.64	45.72	43.69
A2547WVA-F-18P	43.18	48.26	46.23
A2547WVA-F-19P	45.72	50.80	48.77
A2547WVA-F-20P	48.26	53.34	51.31
A2547WVA-F-21P	50.80	55.88	53.85
A2547WVA-F-22P	53.34	58.42	56.39
A2547WVA-F-23P	55.88	60.96	58.93
A2547WVA-F-24P	58.42	63.50	61.47
A2547WVA-F-25P	60.96	66.04	64.01

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	2.54mm PITCH VERTICAL DIP WAFER	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547WVA-F-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
A2		CHANGE THE DRAWING	REV A2	
A1		CHANGE THE DRAWING		
A0		NEW RELEASE		
REV		DESCRIPTION	DATE	